





Installation manual General PART 1/2

DATE : VERSION NR :

2013-09-04

Table of contents

Required equipment / tools / materials for installing a complete system	3
Vehicle check	3
General instructions	4
Introduction	5
Approval numbers VSI LPG / CNG components	6
The Prins LPG reducer	7
The Keihin CNG regulator	8
The injector rail	9
The Prins filter unit	10
The Keihin filter unit	10
The VSI computer	11
VSI-I	11
VSI-2.0 computer	12
Instructions rotating the Prins VSI injector rail	13
The wiring loom.	14
VSI-I	14
VSI-2.0	14
Hose connections	15
Diagram 1 VSI inlet manifold coupling	16
Diagram 2 VSI inlet manifold coupling with nylon hose	17
Diagram 3 Parallel water connection	18
Diagram 4 Serial water connection	19
Diagram 5 Serial water connection CNG regulator	20
The VSI-I fuel switch	21
The VSI-2.0 fuel switch	22
Electrical connections on the LPG reservoir	23
Electrical connections VSI-I wiring harness	24
Electrical connections VSI-I wiring harness	25
Electrical connections VSI-2.0 wiring harness	26
Electrical connections VSI-2.0 wiring harness	27
Insulate all not used wires.	27
Electrical connections VSI-2.0 wiring harness	28
Electrical connections VSI-2.0 wiring harness	29
Electrical connections RPM module 091/0236	30
Electrical connections Petrol Pressure Simulator 091/0252	31
Electrical connections Dual Sensor Interface (DSI)	32
Electrical connections CNG Prins Timing Optimizer (PTO)	33
Diagram CNG PTO wiring Prins Turbo / MAP sensor	33
Prins Turbo / MAP sensor	34
Diagram 5 LPG Base layout VSI 4 cylinder connector	35

Diagram 6 LPG Base layout VSI 4 cylinder solder	36
Diagram 7 LPG Base layout VSI 5 cylinder	37
Diagram 8 LPG Base layout VSI 6 cylinder connector	38
Diagram 9 LPG Base layout VSI 6 cylinder solder	39
Diagram 10 LPG Base layout VSI 8 cylinder connector	40
Diagram 11 LPG Base layout VSI 8 cylinder solder	41
Diagram 12 CNG Base layout	42
Diagram 13 VSI-2.0 LPG Base layout	43
Diagram 14 VSI-2.0 MAP LPG Base layout	44
Diagram 13 Injection module 4-cylinder (180/70024 connector)	46
Diagram 14 Injection module 4-cylinder (180/ 70024 solder)	47
Diagram 15 Injection module 6-cylinder (180/70026 connector)	48
Diagram 16 Injection module 6-cylinder (180/70026 solder)	49
Diagram 17 Injection module 8-cylinder (180/ 70024 connector)	50
Diagram 18 Injection module 8-cylinder (180/70024 solder)	51
Diagram 19 Repair module 180/30024 (4-8 cylinder)	52
Diagram 20 connector injection module 091/71004	53
Diagram 21 injection module 091/71006	54
Diagram 22 Replacing the injection module 180/70024 → 091/0145	55
Diagram 23 Replacing the injection module 180/70024 $ ightarrow$ 091/71004 (4 cylinder)	56
Diagram 24 Replacing the injection module 180/70026 $ ightarrow$ 091/71006 (6 cylinder)	57
Diagram 25 Replacing the injection module 180/70024 $ ightarrow$ 091/71004 (8 cylinder)	58
Diagram 26 LPG wiring 180/70014	59
Diagram 27 LPG wiring 180/70004	60
Diagram 28 LPG wiring 180/70016	61
Diagram 29 LPG wiring 180/70006	62
Diagram 30 LPG wiring 180/70018	63
Diagram 31 LPG wiring 180/70008	64
Diagram 32 LPG wiring 080/72040	65
Diagram 33 LPG wiring 080/72045	66
Diagram 34 LPG wiring 080/72050	67
Diagram 35 LPG wiring 080/72055	68
Diagram 36 LPG wiring 080/72060	69
Diagram 37 LPG wiring 080/72065	70
Diagram 38 CNG wiring 095/72045	71
Diagram 39 VSI-2.0 wiring 191/040002	72
Trouble code chart LPG	73
Maintenance instructions	74
Checklist after installation	76

Required equipment / tools / materials for installing a complete system

- Complete workshop toolbox (wrenches, screwdrivers, cutters, pliers, ratchet, sockets)
- Car lift

- Portable computer : operating on Windows 98,W2000 or XP.

Internal memory : 16 Mb or more

Memory HD space : 5MB

Screen : 256 colours, advise colours 16 bits or more

Com port : 1 free COM port 1 or COM port 2 with a 9 or 25 pins connector

or USB

- Vehicle fuel system scan tool or OBD scan tool Prins (part nr. 099/99928)
- Exhaust gas analyser
- Multimeter
- Oscilloscope
- Prins VSI diagnostic software
- Prins VSI serial interface
- Prins VSI break out box (part nr. 080/70090)
- Torque wrench (10Nm)
- Portable light
- Assortment drill bits 4 to 12 mm
- Assortment cutters (ø 20, 30, 50, 70 mm)
- Punching tool ø 70 mm
- Round file
- Portable drill or pneumatic drill
- Threading device (male M6x1, M8x1, M10x1)
- Pipe-flaring tool (for 6 and 8 mm copper pipe)
- Air gun
- Vacuum cleaner
- Hot air gun
- Allan spanner for inlet couplings 3,5mm (part nr. 099//9970)
- Reducer adjustment tool (part nr. 099/9960)
- Molex extraction tool for VSI switch connector (part nr. 090/9929)
- Soldering iron, soldering tin
- Wire-stripping pliers
- Adhesive tape
- Adhesive sealant
- Thread locking compound
- Anti-corrosion agent / black body coating
- Gas leak detection device or foam leak spray
- Shrink sleeves
- Engine coolant

Vehicle check

- Check the vehicle drivability on petrol
- Check the fuel system for error codes (scan tool)
- Check if the catalytic converter is in good condition (exhaust gas analyzer)
- Check the condition of the ignition system (spark plugs, cables, coil)

General instructions

- The installation of the system shall be done in accordance with the installation manual provided by Prins Autogassystemen.
- Always disconnect the battery when installing the LPG/CNG system.
- Do not place the main fuse into the fuse holder before having completed the installation of the VSI system.
- The VSI computer has to be activated by means of the diagnosis software.
- In the unlikely event the VSI computer fails, it will automatically switch over to petrol.
 Never disconnect the VSI computer connector, unless you have removed the main fuse.
- When installing the VSI wiring harness, ensure that it does not run near any of the ignition components.
- Solder and insulate all electrical connections.
 - The wires in the loom are provided with numbers and text. The text on the wire explains the function of the wire. The wire loom is not model specific, therefore is it may be necessary to adjust the length of the wires. Ensure maximum care is taken when connecting wiring.
 - Make professional joints using solder and shrink sleeve. Do not stretch the wiring harness.
- No component of the LPG/CNG-system shall be located within 100 mm of the exhaust or similar heat source, unless such components are adequately shielded against heat.
- Remove any internal burrs, after having shortened the LPG/CNG hose. (This guarantees the maximum flow through the hose without pollution.)
- If holes have to be drilled (wear safety glasses) in order to facilitate mounting the device frame, the reservoir frame, the LPG/CNG cut-off valve, etc., the drilled holes must always be treated with an anti-corrosive, after the burrs have been removed (especially when mounting a exterior filler).
- After having completed the installation, check the whole system for gas leakage; use a gas leak detection device.
- Fitting and maintenance is only allowed by Prins Autogassystemen selected LPG/CNG engineers.
- Prins Autogassystemen is not responsible for any damages to people or objects as a result of changes to Prins products.
- <u>Check our website regularly for updates, info-bulletins and product information</u>. (www.prinsautogassytemen.com)
- For installing a dedicated VSI-system download DEDICATED MANUAL (part 2/2)

Please fill in the warranty card completely and return it within 8 days after installation.

Introduction

VSI stands for "vapour sequential injection", it points directly to the most important properties of the system. This second-generation gas injection system is based on a vapour LPG/CNG injection that is injected sequentially in the engine. Sequential means that the gas injectors will inject the LPG/CNG in the sequence equal to the injection sequence of the petrol injectors,

This sequence in most applications is equal to the firing order of the ignition sequence of the engine, for example with a 4-cylinder engine this is normally 1-3-4-2. Sequential injection means that the amount of injected fuel per cylinder the can be metered and timed individually.

This achieves a much higher level of performance emission and drivability. The VSI system was designed and developed in-house by Prins Autogassystemen B.V.


VSI characterizes itself with a high level of integration into to the petrol management system. The two systems integrate as "master-slave" system.


This means that the original petrol management ECM controls the amount of LPG/CNG injected via the gas injectors into the engine. The VSI ECM only translates the relevant signals coming from the engine management system necessary for MASTER /SLAVE strategy.

Following this strategy the petrol management system is the "MASTER" and the VSI ECM the "SLAVE". The advantage of this strategy: while driving on LPG/CNG the lambda control and OBD functions keep within the OE parameters, functioning correctly and controlled by the petrol management system. So when operating on LPG/CNG it is not necessary to generate simulated signals.

There is one exception made for the petrol injector signals, while driving on LPG/CNG the petrol injector's are switched off to discontinue the petrol supply. To maintain the injection control signals it is necessary to simulate the petrol injectors to ensure the original ECM does not detect a fault code. Secondly when operating on LPG/CNG it is necessary to maintain a petrol injector control signal to measure the required fuel demand.

The second generation injection system VSI has the ability to inject sequentially making it quicker and more accurate, large benefits can be gained in engine and emission performance.

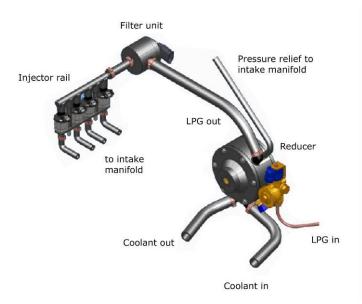

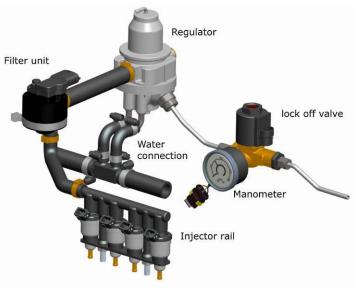

Approval numbers VSI LPG / CNG components

Mark	Component	LPG	CNG
Prins	VSI Reducer	E4-67R-010054	
Valtec	6 / 8mm lock-off valve	E4-67R-010041	
Keihin	Regulator		E4-110R-000092
OMB	lock-off valve		E4-110R-000095
Wika	CNG Pressure indicator		E4-110R-000190
Prins	VSI Injector rail	E4-67R-010093	E4-110R-000021
Keihin	VSI Injector	E4-67R-010092	E4-110R-000020
Prins	Filter unit	E4-67R-010096	E4-110R-000028
Keihin	Filter unit	E4-67R-010177	E4-110R-000091
Prins	ECU	E4-67R-010098	E4-110R-000083
	•	•	•
Electric	cal VSI components	EMC : E4-	10R-020507

VSI-I LPG

VSI-2.0 LPG / VSI-2.0 DI LPG





VSI-1 CNG


VSI-2-0 CNG / VSI-2-0 DI CNG





The Prins LPG reducer


- Mount the reducer to the body of the vehicle in the engine compartment, never on the engine!
- Mount the reducer so that it is easy to adjust the pressure.
- Install the supplied 8 mm threaded end in the back cover of the reducer.
- Mount the reducer as shown in the drawing.
- Mount the reducer on a bracket and bolt on with a M8x1 nut.
- The LPG lock-off valve can be installed in different positions. Do not damage the O-rings when rotating the lock-off valve. See picture for torque moment.
- The reducer is connected to the heating system circuit by couplings between the coolant fluid hoses: dependant on the converted vehicle the reducer is placed in series or in parallel with the heating system.
- Overpressure 5mm relief hose : connect to the intake manifold.
- No component of the LPG-system shall be located within 100 mm of the exhaust or similar heat source, unless such components are adequately shielded against heat.
- The pressure can be adjusted with the adjusting screw (Allan screw) in the front cover.
- Seal the adjusting screw, with the sticker, in the front cover of the reducer after adjusting the pressure.

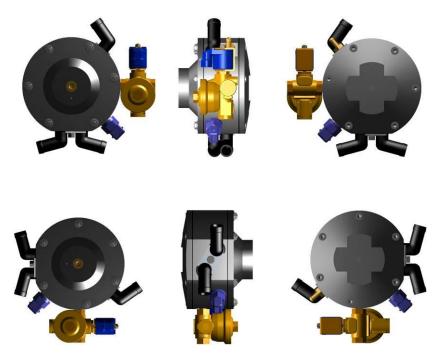

mounting positions



Standard reducer, 6 mm LPG pipe, used for engines with a HP <u>up to</u> 135 kW (180 HP). High Output reducer, 8 mm LPG pipe, used for engines with a HP <u>over</u> 135 kW (180 HP). Use a High Output MAP reducer on blown engines (turbo / compressor)

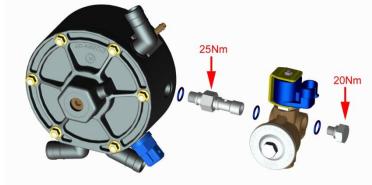

NO threat locking compound allowed !!

The Keihin CNG regulator

- Mount the Keihin regulator to the body of the vehicle in the engine compartment, never on the engine!
- Mount the regulator so that it is easy to replace the inlet filter.
- Mount the regulator as shown in the drawing with the water connections downwards.
- Mount the regulator on a bracket and bolt on with 3 M6x1 nuts.
- The regulator is connected to the heating system circuit by couplings between the coolant fluid hoses
- Optional MAP connection: connect to the intake manifold if needed.
- No component of the CNG-system shall be located within 100 mm of the exhaust or similar heat source, unless such components are adequately shielded against heat.
- The pressure may not be adjusted and is fixed on 3.3 bar





The injector rail



VSI 4-cylinder injector rail [KN8/KN9]

The Prins injector rail is available in 2 - 3 - 4 - 5 rail versions.

Guideline VSI injector choice : divide total engine power in kW up into the amount of cylinders.

LPG:

Color ID (KN-8)	Injector size		power per er [LPG]		power per er [LPG]
		kW	HP	kW	HP
Green	32cc /stroke			13,0	17,4
white	white 42cc/stroke		12,1	15,0	20,1
Blue	52cc/stroke	13,0	17,4	20,0	26,8
Orange	63cc/stroke	18,0	24,1	27,0	36,2
Yellow	Yellow 73cc/stroke		33,5	35,0	46,9
82cc/stroke		28.0	37,6	39,0	52,3
Brown	100cc/stroke	31,0	41,6	45,0	60,3

CNG:

Color ID (KN-8)	Injector size		power per r [CNG]		power per er [CNG]
		kW	HP	kW	HP
Green				9,0	12,1
White	42cc/stroke	7,0	9,4	12,0	16,1
Blue	52cc/stroke	10,0	13,4	16,0	21,5
Orange	63cc/stroke	14,0	18,8	22,0	29,5
Yellow	73cc/stroke	20,0	26,8	28,0	37,5
	82cc/stroke	23,0	30,8	33,0	44,2
Brown	100cc/stroke	25	33,5	36,0	48,3

The Prins filter unit

The filter unit filters the LPG/CNG and is also used to measure the gas temperature (T_gas) and gas pressure (Psys) in the VSI system, by means of a combination sensor.

The filter unit has a single or a double outlet of 11mm.

Single outlet : on converted vehicle with 3-4 or 5 cylinder engines with one VSI injector rail. : on converted vehicle with 6 or 8 cylinder engines with two VSI injector rails.



Single outlet 3-4-5 cylinder engine



Double outlet 6-8 cylinder engine

The Keihin filter unit



The VSI computer

The VSI computer can be mounted into the engine room as well as inside the car, depending on the converted vehicle.

Never mount the computer near a heat source.

Never mount the computer upside down.

Never clean engine room with a high pressure cleaner.

VSI-I



1			_	
1				
29		\rightarrow		100 mm - 0000
30		29		
Social Process Soci	2			
31		30		004100000000000000000000000000000000000
31	3			
32 green-yellow G INJ OUT 2 Grey-yellow G INJ OUT 5 G INJ OUT 5 G INJ OUT 5 G INJ OUT 6 G INJ OUT 5 G INJ OUT 5 INJ OUT 5 G INJ OUT 5 INJ OUT 5 G INJ OUT 5 INJ OUT 5 G INJ		31		
32 grey-yellow G INJ OUT 5	4			CONTRACTOR DESCRIPTION
33		32		
13	[5]			NOT THE PARTY OF T
Ted		[33]		Certain Collins Collins
34				
35		[34]		Parketti a para se de casa accorda
10 36 19 19 10 19 10 19 10 19 10 19 10 19 10 19 10 10		[0.5]		+LPG injectors
36		35		ecu side inj 8
10 37 pink-yellow ecu side inj 3 pink-yellow ecu side inj 3 pink-yellow ecu side inj 6 grey-yellow ecu side inj 5 grey-yellow ecu side inj 5 ecu side inj 5 yellow pulse fuel switch purple-white RPM engine speed grey-white ignition+ land lan		[26]	blue-yellow	ecu side inj 4
10 37 brow-yellow ecu side inj 6 green-yellow ecu side inj 2 grey-yellow ecu side inj 5 white-yellow ecu side inj 5 yellow pulse fuel switch purple-white RPM engine speed grey-white ignition+		30	light blue-yellow	ecu side inj 7
10		27	pink-yellow	ecu side inj 3
38	10	31	brow-yellow	ecu side inj 6
11 39		38	green-yellow	ecu side inj 2
12	11	30	grey-yellow	ecu side inj 5
12		30	white-yellow	ecu side inj 1
13	12-	00	yellow	
13	""	40	purple-white	RPM engine speed
14	13-		grey-white	ignition+
14		41		
15	14		20	
15		42	brown	ECT sensor ground
15				
15				
43	15	$\overline{}$		T-LPG
16	/	[Tall	grey	ECT coolant temp
17	1	143 - \	, ,	
17	16	43	blue	
18	16-	=	blue green	sealed
18		44	blue green green	sealed Psys
19		44	green green orange-white	sealed Psys lambda bank 2
47	17—	44	blue green green orange-white red	Psys lambda bank 2 +5 Volt Psys
20	17— 18—	44	blue green green orange-white red	Psys lambda bank 2 +5 Volt Psys
21 day orange diagnose LED grey RS232 TxD brown main ground grey RS232 RxD red +12 Volt battery 24 52 red +12 Volt battery 25 green-yellow +LPG red-white inj. module command brown INJ simulator ground grey-white ignition+	17— 18—	44 45 46	blue green green orange-white red	Psys lambda bank 2 +5 Volt Psys
21	17— 18— 19	44 45 46	blue green green orange-white red	Psys lambda bank 2 +5 Volt Psys
22	17— 18— 19	44 45 46 47	blue green green orange-white red orange	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1
22	17— 18— 19 20	44 45 46 47	blue green green orange-white red orange	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1
50 brown main ground grey RS232 RxD red +12 Volt battery 51 red +12 Volt battery 52 red +12 Volt battery 53 green-yellow +LPG red-white inj. module command brown INJ simulator ground grey-white ignition+ 55 56	17— 18— 19 20	44 45 46 47 48	blue green green orange-white red orange black	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low
23	17— 18— 19 20 21	44 45 46 47 48	blue green green orange-white red orange black orange	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED
24 52 red	17— 18— 19 20 21	44 45 46 47 48 49	blue green green orange-white red orange black orange grey	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED R\$232 TxD
24 52 red +12 Volt battery 25 green-yellow +LPG red-white inj. module command brown INJ simulator ground grey-white ignition+	17— 18— 19 20 21	44 45 46 47 48 49	blue green green orange-white red orange black orange grey brown	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED RS232 TxD main ground
red +12 Volt battery green-yellow +LPG 53 red-white inj. module command brown INJ simulator ground grey-white ignition+ 55 28	17— 18— 19 20 21	44 45 46 47 48 49 50	blue green green orange-white red orange black orange grey brown grey	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED RS232 TxD main ground RS232 RxD
25 green-yellow +LPG 26 pred-white inj. module command 54 prown INJ simulator ground 27 grey-white ignition+	17— 18— 19 20 21 22— 23—	44 45 46 47 48 49 50	blue green green orange-white red orange black orange grey brown grey	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED RS232 TxD main ground RS232 RxD
26 red-white inj. module command 54 brown INJ simulator ground 27 grey-white ignition+ 55 28 56	17— 18— 19 20 21 22— 23—	44 45 46 47 48 49 50	blue green green orange-white red orange black orange grey brown grey	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED RS232 TxD main ground RS232 RxD
26 Fed-white IIIJ, illocate command INJ, simulator ground INJ, simulat	17— 18— 19 20 21 22— 23— 24	44 45 46 47 48 49 50	blue green green orange-white red orange black orange grey brown grey red	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED R\$232 TxD main ground R\$232 RxD +12 Volt battery
27 grey-white ignition+	17— 18— 19 20 21 22— 23— 24	44 45 46 47 48 49 50 51 52	blue green green orange-white red orange black orange grey brown grey red	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED RS232 TxD main ground RS232 RxD +12 Volt battery
27 grey-white ignition+	17— 18— 19 20 21 22— 23— 24 25—	44 45 46 47 48 49 50 51 52	blue green green green orange-white red orange black orange grey brown grey red red green-yellow	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED RS232 TxD main ground RS232 RxD +12 Volt battery +12 Volt battery +LPG
28 55 56	17— 18— 19 20 21 22— 23— 24 25—	44 45 46 47 48 49 50 51 52	blue green green green orange-white red orange black orange grey brown grey red red green-yellow red-white	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED RS232 TxD main ground RS232 RxD +12 Volt battery +LPG inj. module command
28 56	17— 18— 19 20 21 22— 23— 24 25— 26—	44 45 46 47 48 49 50 51 52	blue green green orange-white red orange black orange grey brown grey red red green-yellow red-white brown	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED RS232 TxD main ground RS232 RxD +12 Volt battery +LPG Inj. module command INJ simulator ground
56	17— 18— 19 20 21 22— 23— 24 25— 26—	44 45 46 47 48 49 50 51 52 53	blue green green orange-white red orange black orange grey brown grey red red green-yellow red-white brown	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED RS232 TxD main ground RS232 RxD +12 Volt battery +LPG Inj. module command INJ simulator ground
	17—18—19 20 21 22—23—24 25—26—27—	44 45 46 47 48 49 50 51 52 53	blue green green orange-white red orange black orange grey brown grey red red green-yellow red-white brown	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED RS232 TxD main ground RS232 RxD +12 Volt battery +LPG Inj. module command INJ simulator ground
	17—18—19 20 21 22—23—24 25—26—27—	44 45 46 47 48 49 50 51 52 53 54	blue green green orange-white red orange black orange grey brown grey red red green-yellow red-white brown	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED RS232 TxD main ground RS232 RxD +12 Volt battery +LPG Inj. module command INJ simulator ground
VSI computer connect	17—18—19 20 21 22—23—24 25—26—27—	44 45 46 47 48 49 50 51 52 53 54	blue green green orange-white red orange black orange grey brown grey red red green-yellow red-white brown	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED RS232 TxD main ground RS232 RxD +12 Volt battery +LPG Inj. module command INJ simulator ground
	17—18—19 20 21 22—23—24 25—26—27—	44 45 46 47 48 49 50 51 52 53 54	blue green green green orange-white red orange black orange grey brown grey red red green-yellow red-white brown grey-white	sealed Psys lambda bank 2 +5 Volt Psys lambda bank 1 beeper low diagnose LED RS232 TxD main ground RS232 RxD +12 Volt battery +LPG inj. module command INJ simulator ground ignition+

VSI-2.0 computer

The Prins VSI-2.0 computer is the second generation master-slave management system. This new design has distinctive features and will be used as a new platform for current and future Prins injection systems.



	Connector B			Connector A														
pin	vsi wire	color	pin	vsi wire	color	pir	vsi wire	color	pir	n vsi wir	re	color	pin	vsi wire	color	pin	vsi wire	color
82	- GAS INJ 4	blue/yellow	103	n.c.			Ground Battery	brown		n.cc gn	nd		43	n.c.		64	n.c.	
83	n.c.		104				Power tank valve 1	red		3 n.c.			44	n.c.			Service RxD	grey
84	n.c.		105				+ 12 V Fuel switch	red	24	+12V red	ducer lock off	green-yellow		K-line	purple		Ground fuel switch	brown
85	n.c.		106	+ GAS INJ 1	red		+12V batt. (10A Fuse)	red		n.c.				Service TxD		67		
	n.c.			+ GAS INJ 2	red		n.c.				Tank lock off	black	47	n.c.			Ground PDT	brown
	n.c.			+ GAS INJ 3	red		n.c.			7 +5 volt s	sensor	red		n.c.		69		
88	n.c.		109				n.c.		28	3 n.c.				LIN fuel switch	yellow	70		
89	n.c.		110				RPM engine speed	purple-white	29	n.c.			50	n.c.			n.cc gnd	
90	+ GAS INJ 4	red	111				+5 Volt sensor	red) n.c.				n.c.		72		
91	n.c.			+ Petrol injectors	red-grey	10	n,c,			C Ground		brown	52	n.c.			n,c,_c gnd	
92	n.c.		113				n.c.				battery sense	brown		n.c.		74		
93	n.c.			min inj side 4	blue		Tank level IN	blue		n.cc gn				n.c.		75		
94	n.c.			ECU side inj 4	blue-yellow		+12 V Battery sense	red		C Ground		brown		n.c.		76		
95	n.c.			min inj side 3	pink		T-Gas	grey		C Ground		brown		n.c.		77		
96	n.c.			ECU side inj 3	pink-yellow		T-ECT	grey		n.cc gn				n.c.		78		
97	n.c.			min inj side 2	green		Psys	green		C Ground		brown	58	n.c.			n.cc gnd	
98	- GAS INJ 1	white-yellow		ECU side inj 2	green-yellow		AD2 (Valve Care)	green		n.cc gn				n.c.			n.cc gnd	
99	- GAS INJ 2	green-yellow		min inj side 1	white		AD1 (MAP)	blue		n.cc gn				n.cc gnd		81	n.cc_gnd	
100		pink-yellow	121	ECU side inj 1	white-yellow			orange-white) n.cc gn				n.cc gnd				
101							AD3 (lambda 1)	orange		n.cc gn				n.cc gnd				
102	n.c.	l				21	n.c.	l	42	n.cc gn	nd		II63	n.cc gnd	1			1

Instructions rotating the Prins VSI injector rail


This is an instruction how to convert a "right" rail into a "left" injector rail

Tools: Ring spanner size 13 mm

Torque spanner (0-3 Nm)

Disassembly / assembly:

- 1. Unscrew both M8 (4) nuts.
- 2. Remove the strip (2).
- 3. Remove the injectors (10) with a rotating movement out of the fuel rail (1).
- 4. Rotate the rail (1) 180 degrees.
- 5. Mount the injectors (10) with a rotating movement into the fuel rail (1).
- 6. Mount the strip (2) on the injectors (10).
- 7. Tighten the strip (2) with two M8 nuts (4). Tightening moment **2.5 Nm**.

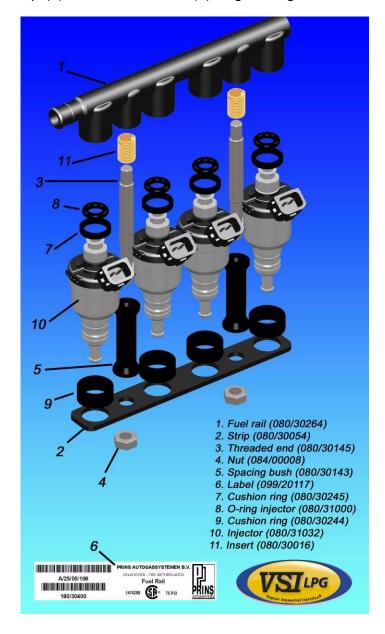

The wiring loom.

The cables in the loom are provided with numbers and text. The text on the cable explains the function of the wire. The wire loom is not model specific, therefore is it may be necessary to adjust the length of the wires.

The watertight ECM housing is made from aluminium; this material is chosen for its excellent heat dissipation qualities, necessary for cool the injector drivers.


Always fix the computer in the coolest place in the engine compartment.

All cable numbers correspond with a position numbered on the connector. Example wire number 4 is mounted on connector position 4.

Ensure maximum care is taken when connecting wiring. Make professional solder joints and insulate the joints. Do not stretch the wiring harness.

VSI-I

The wiring harness is equipped with a 56 position interlocking connector which slots into the VSI computer. Pull the purple interlocking clip and push the connector into the VSI computer, push the clip back into its original position, the connector is now locked into the VSI computer.

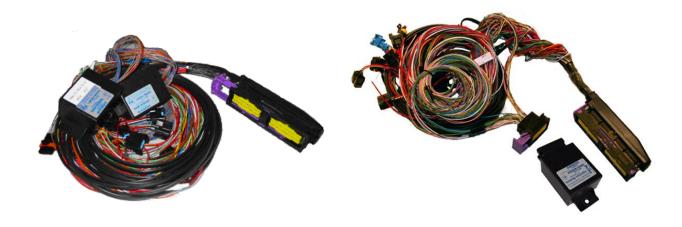

VSI-2.0


The wiring harness connects to the computer via two Bosch a 81+40 pins connector which is locked to the VSI-2.0 computer by means of connector clamping mechanism.






Hose connections

Try to keep the inlet manifold hoses as short as possible. Use a hose clamp on all the LPG/CNG hose connections. Please observe that there is no damage or fouling to the hoses.

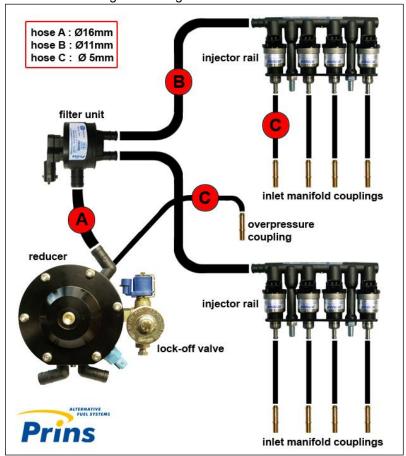

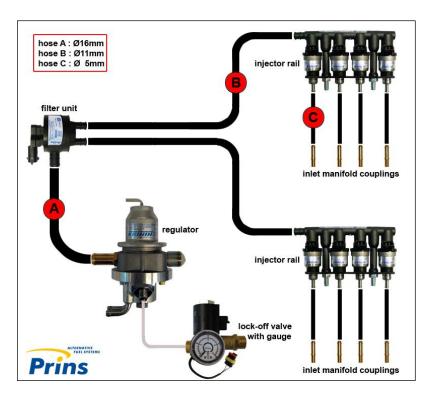

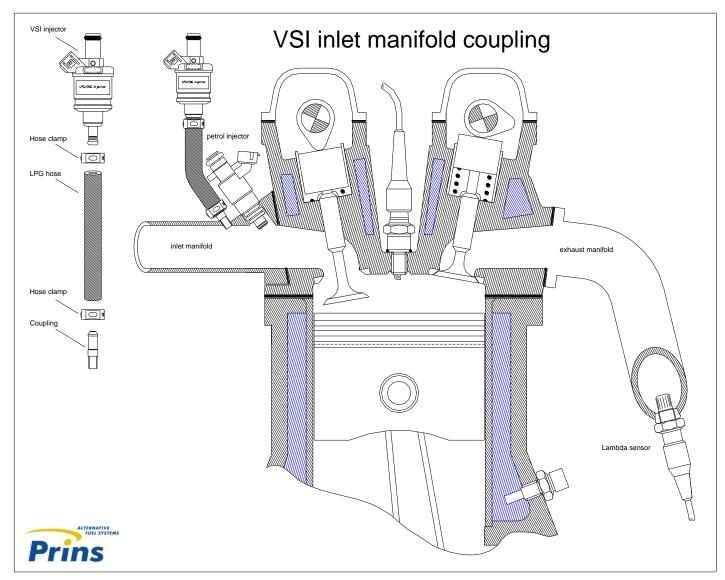


Diagram 1 VSI inlet manifold coupling

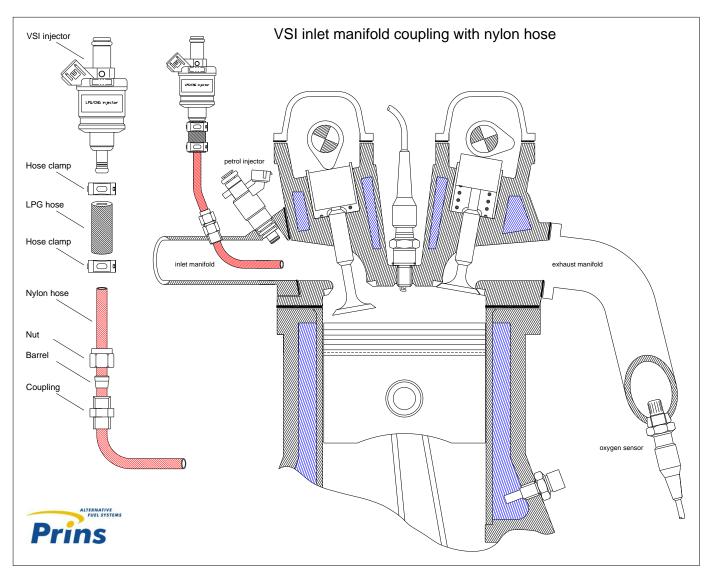


Diagram 2 VSI inlet manifold coupling with nylon hose

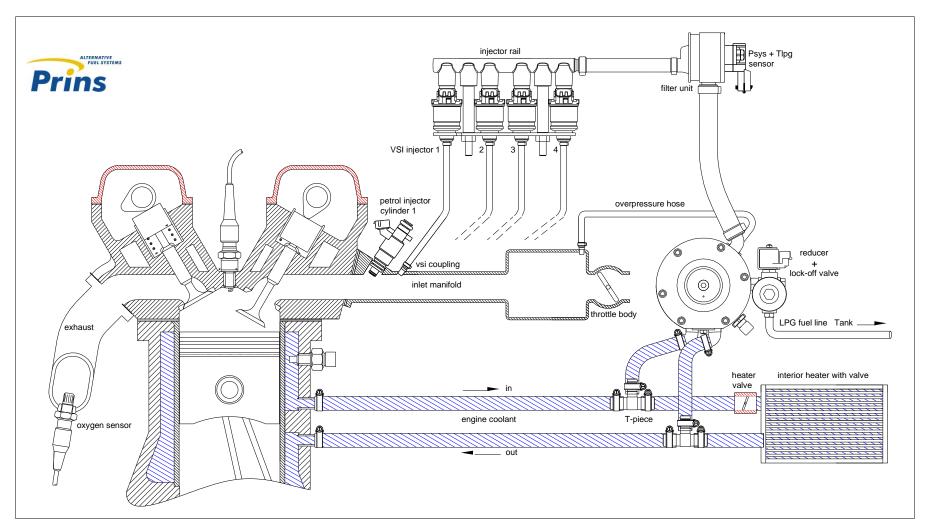


Diagram 3 Parallel water connection

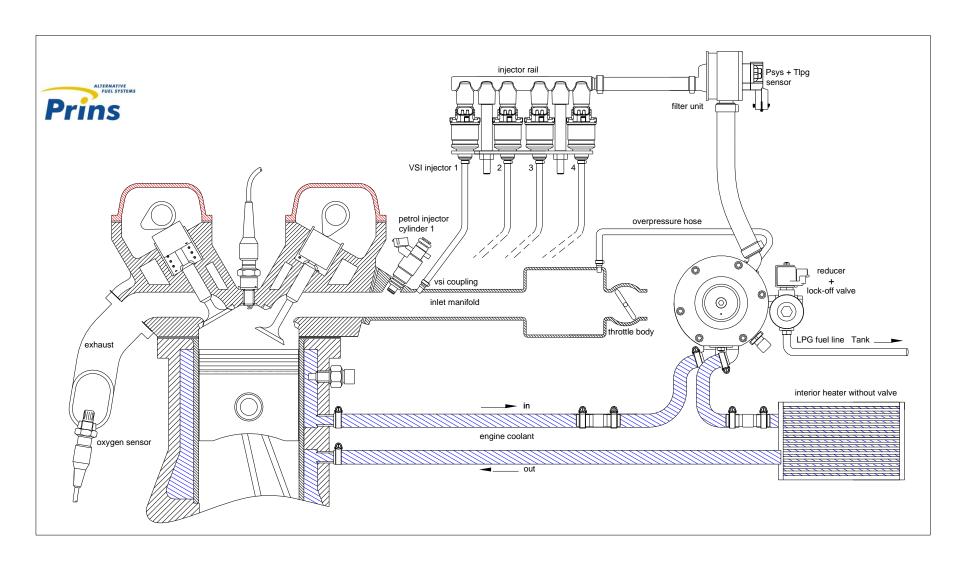


Diagram 4 Serial water connection

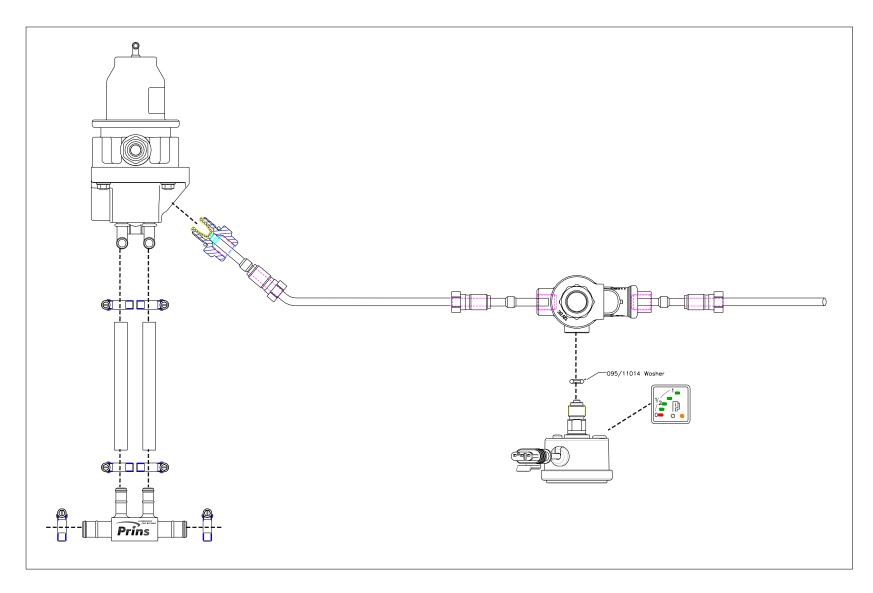


Diagram 5 Serial water connection CNG regulator


The VSI-I fuel switch




Mount the switch on a visible and approachable place for the driver. When mounting the switch, only push on its sides.

Pushing the switch in the centre may result in damage to the switch.


ELECTRICAL CONNECTION OF THE LPG SWITCH with loose beeper

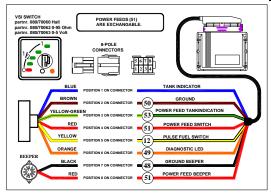

ELECTRICAL CONNECTION OF THE LPG SWITCH with internal beeper

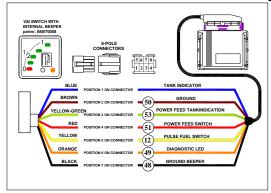

ELECTRICAL CONNECTION OF THE CNG SWITCH with internal beeper

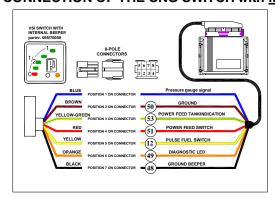

The LPG VSI switch with internal beepers is programmable for different types of tank indicators. Standard setting of the switch is 0-95 Ohm.

For reprogramming the switch:

- 1. Make sure that the ignition switch is turned off.
- 2. Place the VSI main fuse.
- 3. Push the switch for 5 seconds until a signal sounds (beep).
- 4. Make a choice immediately:


 push 1 x for 0-95 Ohm tank indicator
 push 2 x for Hall tank indicator
 (push 3 x preparation VSI2, not used)
- 5. The VSI switch will confirm the choice with a beep signal (1 or 2 signals)

To change the choice of indicator: remove the VSI main fuse and start with step 1.

The CNG switch is not programmable. The CNG switch is not exchangeable with a LPG switch!

The VSI-2.0 fuel switch


The VSI-2.0 switch is designed for the new VSI-2.0 platform. The switch is controlled by the VSI-2.0 computer through LIN communication.

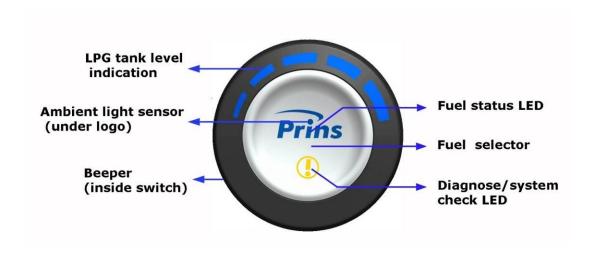

Operation mode	Fuel selection	Active fuel	Status LED	Tank LEDS	Beeper	Diagnose LED
Engine off	GAS/Petrol	No	Off	Off	Off	Off
Contact+ on /engine of	Petrol	No	Off	On	Off	on 3 sec (system check)
Contact+ on /engine of	Gas	No	flashing1, 0Hz	Off	Off	on 3sec (system check)
Engine on	Petrol	Petrol	Off	On	Off	Off
Gas standby	Gas	Petrol	flashing 1,0Hz	On	Off	Off
Gas mode	Gas	Gas	On	On	Off	Off
Tank empty, switched back to petrol mode	Gas	Petrol	flashing1, 0Hz	LED 1 1,0Hz	3x0,5Hz	Off
Tank empty, petrol mode	Petrol	Petrol	Off	Led1 on	Off	Off
Critical fault	Gas	Petrol	flashing 1,0 Hz	On	On, 2Hz	On
Non critical fault, petrol mode	Petrol	Petrol	Off	On	Off	Off
Non critical fault, gas mode	Gas	Gas	on	On	Off	Flashing 1,0 Hz

Electrical connections on the LPG reservoir

The wire harness contains the wires for connecting the LPG reservoir. Refer to the following diagram when connecting the LPG reservoir.

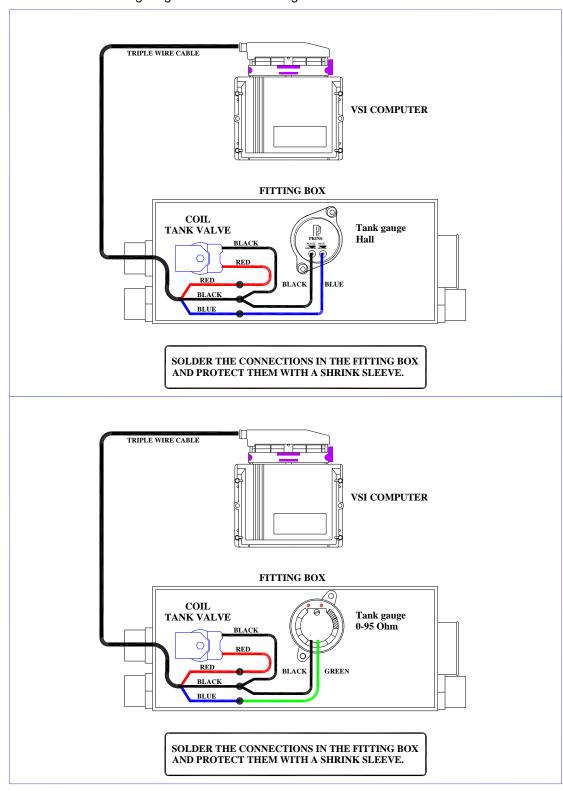

Check and measure the wiring in case of changes in the cars wiring colours.

Wir	e number / code	Wire colour	Connection	
50	MAIN GND	brown		e battery; use a ring terminal for this
			purpose.	. ,,
25-	51 +12V BAT	red		e battery; use a ring terminal for this
			purpose or solder.	,, <u></u>
				fuse into the fuse holder before
				nstallation of the system.
50	LPG/CNG VLV GND	brown		2-pole connector shut-off valve.
53	+ LPG/CNG VLV	yellow - green	Power supply shut-off valve.	
42	ECT GND	brown	Ground ECT sensor.	2-pole black connector temperature
43	ECT	grey	ECT measurement.	sensor in the evaporator.
22	RS232 TxD	grey	1	diagnosis wire connection.
23	RS232 RxD	grey	Pore stack connector	
50	DIAGNOSE GND	brown		
51	+12V DIAG	red		
15	T LPG	grey	4-pole black connector	filter unit connection
17	Psys	pale green	+ pole black conficctor	The drift confidence.
18	+ 5V Psys	red		
42	Psys GND	brown		
33	33G INJ OUT 1	white - yellow	Connector VSI-injector	to cylinder 1
34	34 G INJ A PLUS	red		to cymraci 1.
32	32G INJ OUT 2	green - yellow	Connector VSI-injector	to cylinder 2.
34	34 G INJ A PLUS	red	Commoder vor injude	15 571001 = 1
31	31G INJ OUT 3	pink - yellow	Connector VSI-injector	to cylinder 3.
34	34 G INJ A PLUS	red		,
30	30G INJ OUT 4	blue - yellow	Connector VSI-injector	to cylinder 4.
34	34 G INJ A PLUS	red		,
5	5G INJ OUT 5	grey - yellow	Connector VSI-injector	to cylinder 5.
6	34 G INJ A PLUS	red		•
4	4G INJ OUT 6	brown - yellow	Connector VSI-injector	to cylinder 6.
6	34 G INJ A PLUS	red	,	-
3	3G INJ OUT 7	light blue -	Connector VSI-injector	to cylinder 7.
6	34 G INJ A PLUS	yellow		-
		red		
2	2G INJ OUT 8	red - yellow	Connector VSI-injector	to cylinder 8.
6	34 G INJ A PLUS	red	0 "	
44	AD1	green	Option, programmable	nput
40	MAD	h.i	For monogonia a that he	monifold processes (NAAD)
16	MAP	blue		manifold pressure (MAP).
18 42	+ 5V MAP MAP GND	red	In combination with Pri	IIS TUIDU/IVIAP SEIISUL
42	IVIAP GIVD	brown		
PT	O CRANK-D	nuralo / nuralo	For interrupting the are	nk signal on CNG
- 10	J CRAINN-D	purple / purple- yellow	For interrupting the cra	TIK SIGHAL UH CING.
		, 011011		
50	Ground	blue	For measuring the high	pressure signal of the CNG system
53	+ CNG	green-yellow		ns High Pressure gauge
	Signal	blue		
	Signal	Dido	I	

Check and measure the wiring in case of changes in the cars wiring colors.

13	IGNITION +	grey-white	Make a connection to ignition + / contact +. Make sure that the voltage will not fail during starting the engine.
46	LAMBDA 1-L	orange	For the measurement of the lambda signal of cylinder bank 1. Connect the wire parallel to the lambda sensor signal wire.
45	LAMBDA 2-R	orange-white	For the measurement of the lambda signal of cylinder bank 2. Connect the wire parallel to the lambda sensor signal wire.
40	RPM	purple-white	For measuring the engine speed. Connect to a Hall-sensor or camshaft sensor, Make sure that the <u>squared</u> signal is not higher then 30 Volt ! Never connect to the ignition coil (only with a RPM module)!
	tor measure wire ction module)	Bicolour / Full colour	For measuring / interrupting the petrol injectors :
39 38 37 36 11 10 9			Interrupt each petrol injector control wire (injector min) Each VSI wire has a cylinder number printed on the wire, connect this wire to the corresponding petrol injector. Connect the bicoloured VSI measuring wire to the ecu side , (wire code: ECU SIDE). Connect the accompanying full coloured VSI wire to the
0			petrol injector side (wire code: MIN INJ SIDE). See diagrams in Installation Manual General part 1 / 2.
			Attention: Each bicoloured measuring wire corresponds to a specific LPG injector and cylinder number. Do not interchange the wires.
White Gree Pink- Blue- Grey Bruin Ligh	en-yellow vsi nr. eyellow vsi nr. eyellow vsi nr. eyellow vsi nr. eyellow vsi nr. et blue-yellow vsi nr.	38 (petrol inject 37 (petrol inject 36 (petrol inject 11 (petrol inject 10 (petrol inject . 09 (petrol inject	=> VSI-ecm => VSI injector rail tor cyl.1) => VSI-ecm=> White-yellow vsi nr.33 (vsi injector cyl.1) tor cyl.2) => VSI-ecm=> Green-yellow vsi nr.32 (vsi injector cyl.2) tor cyl.3) => VSI-ecm=> Pink-yellow vsi nr.31 (vsi injector cyl.3) tor cyl.4) => VSI-ecm=> Blue-yellow vsi nr.30 (vsi injector cyl.4) tor cyl.5) => VSI-ecm=> Grey-yellow vsi nr.05 (vsi injector cyl.5) tor cyl.6) => VSI-ecm=> Brown-yellow vsi nr.04 (vsi injector cyl.6) ctor cyl.7) => VSI-ecm=> Light blue-yellowvsi nr.03 (vsi injector cyl.7) tor cyl.8) => VSI-ecm=> Red-yellow vsi nr.02 (vsi injector cyl.8)

Check and measure the wiring in case of changes in the cars wiring colours. Insulate all not used wires.

Wire	number / code	Wire colour	Connection
1	ground battery	brown	Connect to the '-' of the battery; use a ring terminal for this
			purpose.
			Wire colour :
			Wire location:
32	ground battery sense	brown	Connect to the '-' of the battery together with VSI wire 1
	,		ground battery.
44	+12V battery	red	Connect to the '+' of the battery; use a ring terminal for this
			purpose or solder.
			Wire colour :
			Wire location:
			Do not place the fuse in the holder before having
			completed the installation of the LPG system.
13	+12V battery sense	red	Connect to the '+' of the battery together with VSI wire 44
			+12V battery.
112	+ petrol injectors or	red-grey	Make a connection to + petrol injector or ignition+ (+15)
	ignition+ (+15)		Wire colour:
			Wire location :
20	AD3 (lambda 1)	orange	For the measurement of the lambda signal of cylinder bank
			Connect the wire in parallel to the lambda sensor.
			Wire colour:
			Wire location :
19	AD4 (lambda 2)	orange-white	For the measurement of the lambda signal of cylinder bank
'	712 ((ambaa 2)	orango mino	2
			Connect the wire in parallel to the lambda sensor.
			Wire colour :
			Wire location:
18	AD1 (MAP)	blue	For measuring the inlet manifold pressure (MAP).
	. ()		Wire colour:
			Wire location:
17	AD2 (Valve Care)	green	Optional connection.
			Wire colour:
			Wire location :
	DDM		Transcription the control of
8	RPM	purple-white	For measuring the engine speed.
			Wire colour:
			Wire location :

Check and measure the wiring in case of changes in the cars wiring colours. Insulate all not used wires.

3-po	ole connector AD1 (MAP)	blue	For measuring the inlet manifold pressure (Prins MAP sensor).
27	+5 volt sensor	brown	Connect the 3-pole connector to the Prins MAP sensor.
37	C ground	red	
	ole blue connector		For measuring the engine coolant temperature (Tect).
15 34	Tect C ground	grey brown	Connect the connector to the reducer temperature sensor.
	ole connector		For measuring gas pressure and temperature.
35	C ground	brown	
14	T-Gas	grey	Connect the connector to the filter unit sensor.
9	+5 Volt sensor	red	
16	Psys	green	
2 0	ole connector		
2-pt	+12V reducer lock-	yellow-green	Connect the connector to the reducer lock-off valve.
24	off	brown	Connect the connector to the reducer lock-on valve.
31	Ground reducer lock-	DIOWII	
	off		
	-		
4-pc	ole connector		
46	Service TxD	grey	
65	Service RxD	grey	Diagnose connector.
68	C ground	brown	
	ole connector		
3	+12V fuel switch	red	
66	ground fuel switch	brown	Connect to the VSI switch.
49	LIN fuel switch	yellow	
Tan	k wiring loom		
2	Power tank valve 1	red	Connect to the tank lock-off.
12	Tank level in	blue	Connect the tank level gauge.
26	ground tank lock off	black	Connect to the tank lock-off.
<u> </u>	J		

Check and measure the wiring in case of changes in the cars wiring colours. <u>Some wires/connectors are only available in the Full Spec VSI loom.</u> Insulate all not used wires.

			Optional / insulate / Connect to EOBD diagnose connector			
51	CAN 1 High	blue-yellow	Pin: 6			
70	CAN 1 Low	blue	Pin : 14			
	9 7 20]	5.0.0	1			
53	CAN 2 High	pink-yellow	Optional / insulate / Connect to EOBD diagnose connector			
72	CAN 2 Low	pink				
		•				
23	ground switched 2	yellow	Optional / insulate			
	<u> </u>	-				
28	+5V (EXT)	red	Optional / insulate			
29	+5V PU1 (optional)	red	Optional / insulate			
30	+5V PU2 (optional)	red	Optional / insulate			
43	+GAS injectors	red	Optional / insulate			
45	K-line	pink	Optional / insulate			
	T					
57	+12V (external)	red	Optional / insulate			
	Ţ					
76	power tank valve 2	red	Connect to the second tank lock-off valve.			
22	ground switched 1	brown	Optional / insulate			
	3-pole connector		On a set to the ONO birth areas are			
11	+ manometer	red	Connect to the CNG high pressure gauge			
12	tank level in	blue	Optional / insulate			
33	ground manometer	brown				

Check and measure the wiring in case of changes in the cars wiring colours.



For measuring the petrol injectors :

Interrupt each petrol injector control wire (injector min)

Each VSI wire has a petrol injector / cylinder number printed on the wire, connect this wire to the corresponding petrol injector / cylinder.

Connect the bicoloured VSI measuring wire to the ecu side, (wire code: ecu side inj). Connect the corresponding full coloured VSI wire to the petrol injector side (wire code: min inj side).

Attention:


Each bicoloured measuring wire corresponds to a specific VSI injector and petrol injector / cylinder number. Do not interchange the wires.

VSI measure wire nr. :		Full coloured / Bicoloured	To interrupt petrol injector wire colour / location	
121	ecu side injector 1	white-yellow	Colour :	
120	injector side inj 1	white	Location :	
110			0.1	
119	ecu side injector 2	green-yellow	Colour :	
118	injector side inj 2	green	Location :	
117	ecu side injector 3	pink-yellow	Colour:	
116	injector side inj 3	pink	Location :	
		•		
115	ecu side injector 4	blue-yellow	Colour :	
114	injector side inj 4	blue	Location :	
	-			

VSI injector connectors:

98	-GAS INJ 1	white-yellow	Connector VSI-injector cylinder 1.
106	+GAS INJ 1	red	(timing belt side)
99	-GAS INJ 2	green-yellow	Connector VSI-injector cylinder 2.
107	+GAS INJ 2	red	
100	-GAS INJ 3	pink-yellow	Connector VSI-injector cylinder 3.
108	+GAS INJ 3	red	
82	-GAS INJ 4	blue-yellow	Connector VSI-injector cylinder 4.
90	+GAS INJ 4	red	


Electrical connections RPM module 091/0236

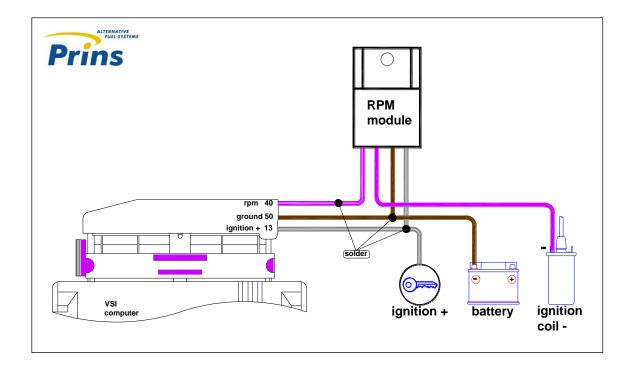

- Connect the brown wire of the RPM module to the brown wire nr.50 of the VSI wiring loom.
- Connect the purple-white wire of the RPM module to the purple-white wire nr.40 of the VSI wiring loom.
- Connect the grey-white wire of the RPM module to the grey-white wire nr.13 of the VSI wiring loom.
- Connect the purple wire of the RPM module to the ignition coil driver wire.

Electrical connections Petrol Pressure Simulator 091/0252

Engines equipped with a return less fuel system. These engines can generate trouble codes and/or have difficulties with the fuel trims(mixture) on both petrol and lpg.

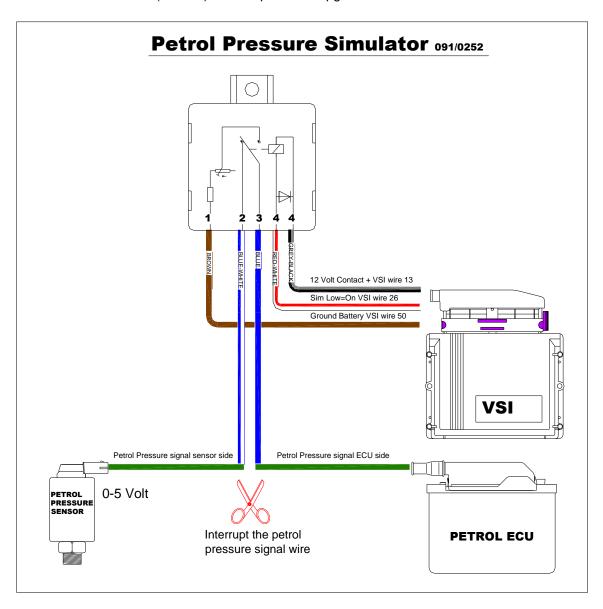

Brands: Mainly brands who are connected with Ford technologies like:


- * Ford models from 2003/2004
- * Jaguar models from 2003/2004
- * Some Volvo models from 2003

Connections and Set-up

Connect the PPS module according the shown schematic. Measure the voltage, on petrol, for the blue wire (pressure sensor signal wire) when the engine is idling. Or read the actual petrol pressure when you have the disposal of a scan tool which can read the actual petrol system pressure.

Next we have to setup the same Voltage (pressure) when running on LPG via de pot meter. The pot meter is accessible when you remove the small protection cover of the module.

Electrical connections Dual Sensor Interface (DSI)

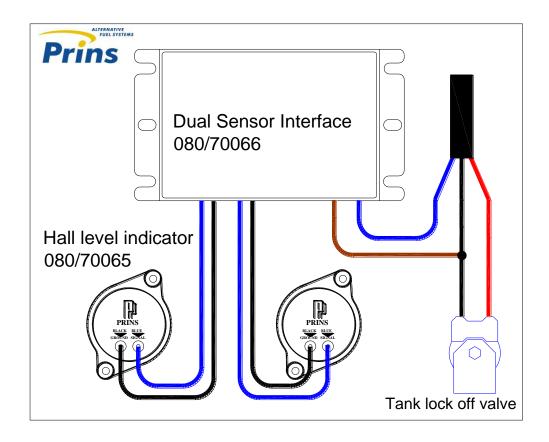


DSI connection:

Connect the interface wiring according to drawing, all blue and black wires are exchangeable since they are internally connected.

The DSI makes it possible to connect two level sensors to one lpg switch.

The DSI will always show the highest lpg level on the switch.


Electrical connections CNG Prins Timing Optimizer (PTO)

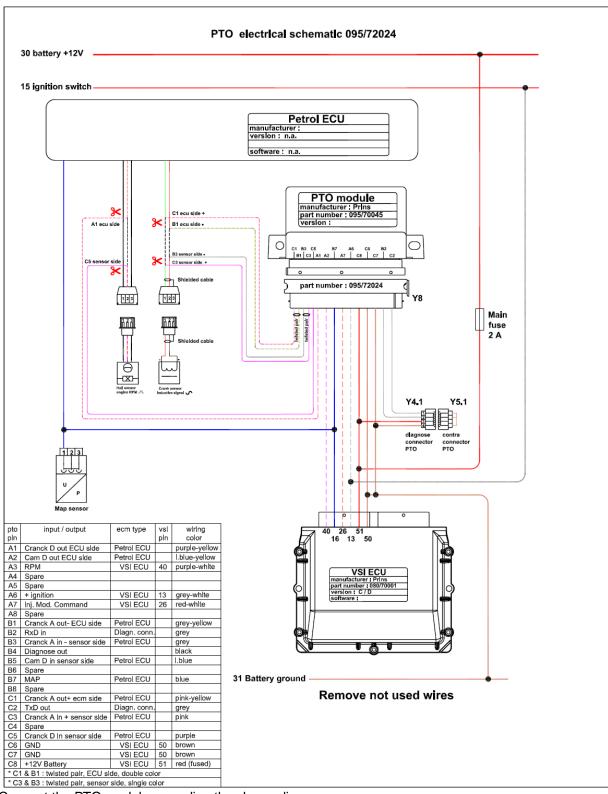

Connect the PTO module according the shown diagram. Check if the latest software is downloaded in the PTO!

Diagram CNG PTO wiring

Prins Turbo / MAP sensor

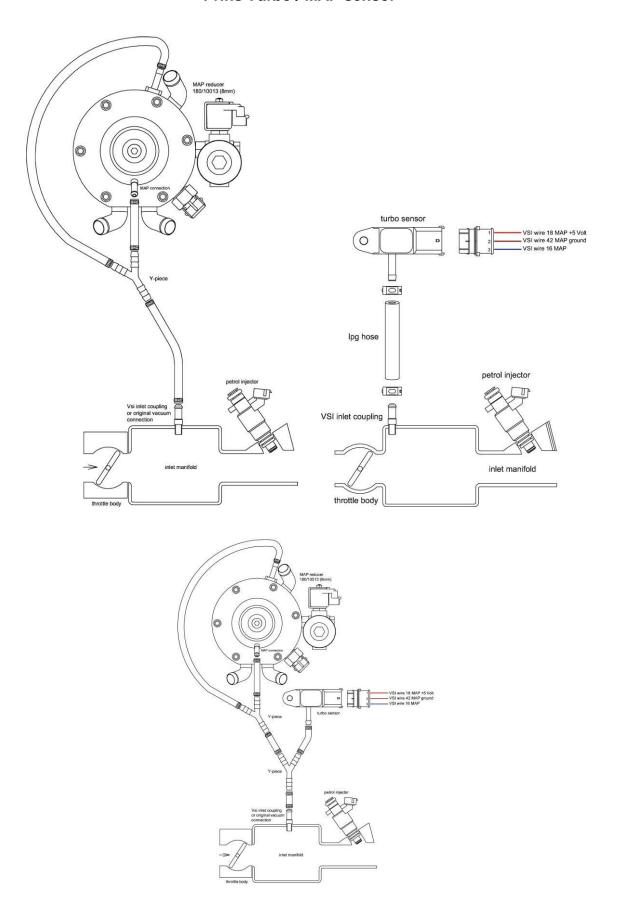

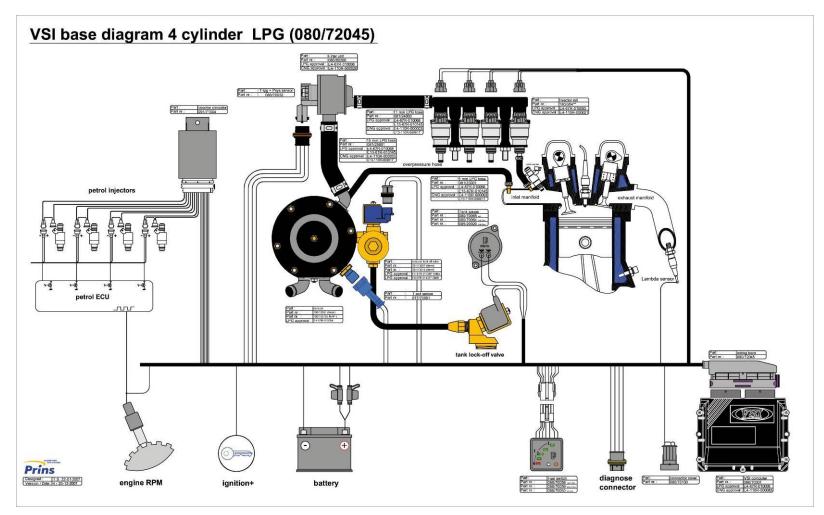


Diagram 5 LPG Base layout VSI 4 cylinder connector

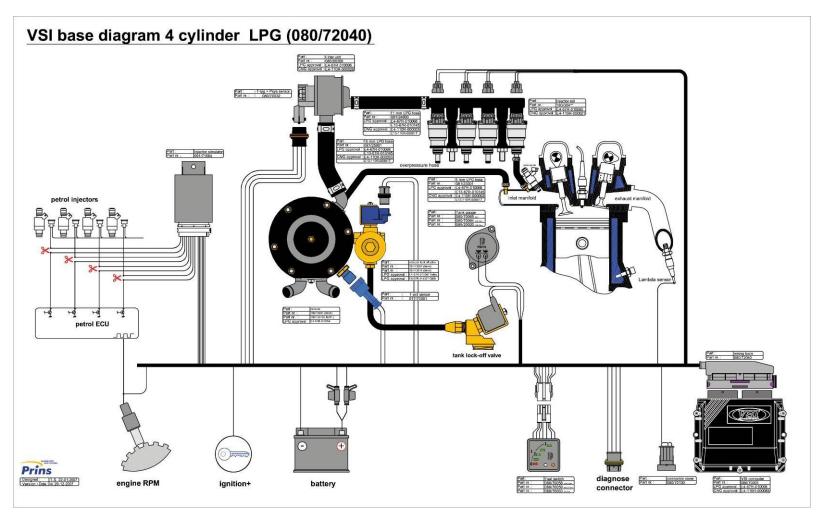


Diagram 6 LPG Base layout VSI 4 cylinder solder

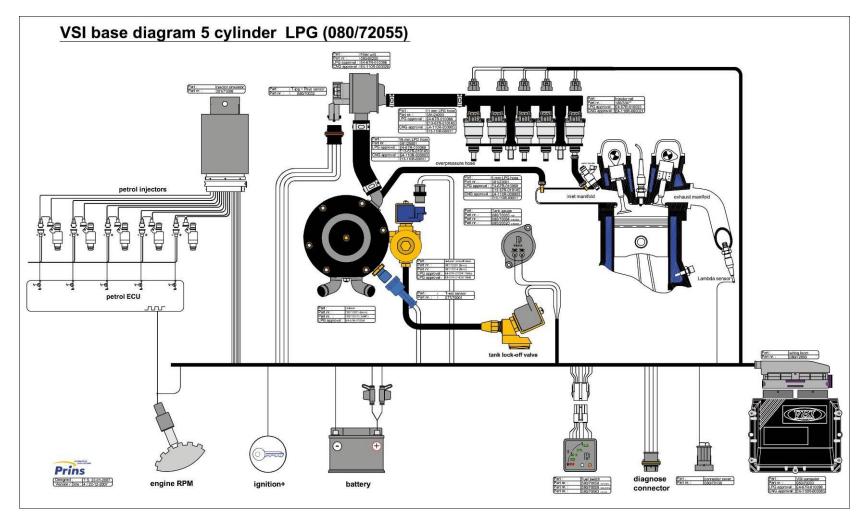


Diagram 7 LPG Base layout VSI 5 cylinder

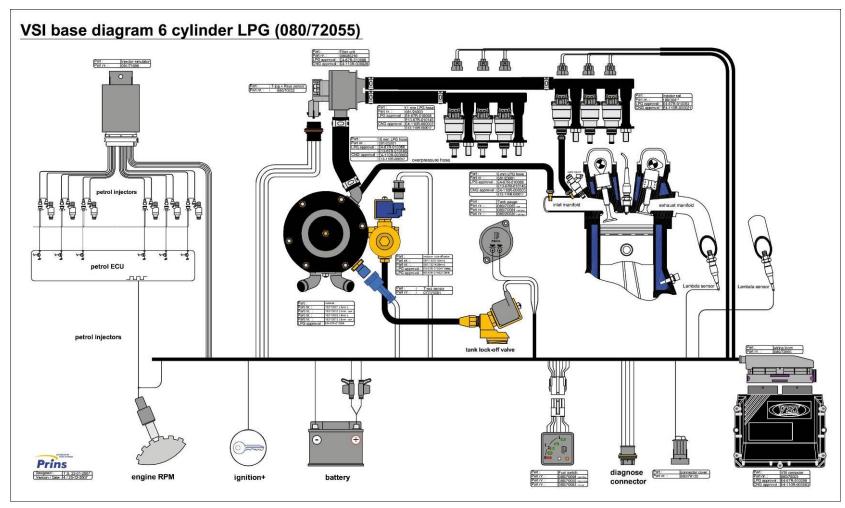


Diagram 8 LPG Base layout VSI 6 cylinder connector

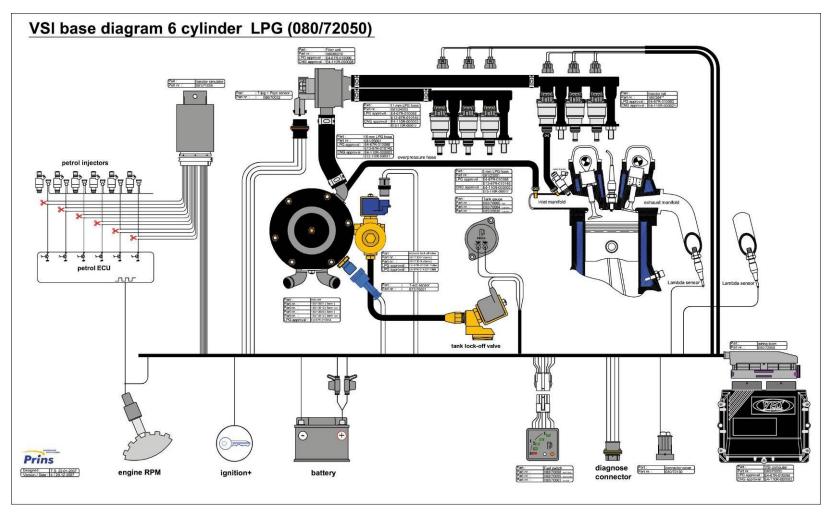


Diagram 9 LPG Base layout VSI 6 cylinder solder

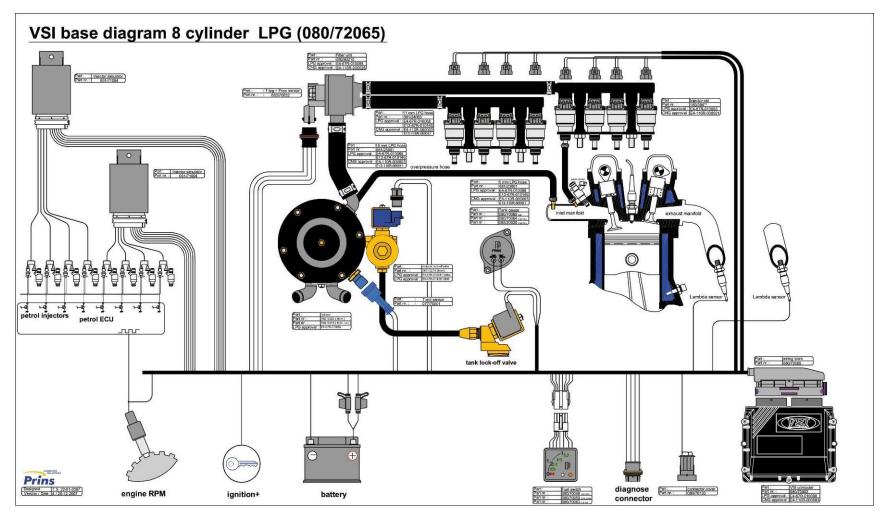


Diagram 10 LPG Base layout VSI 8 cylinder connector

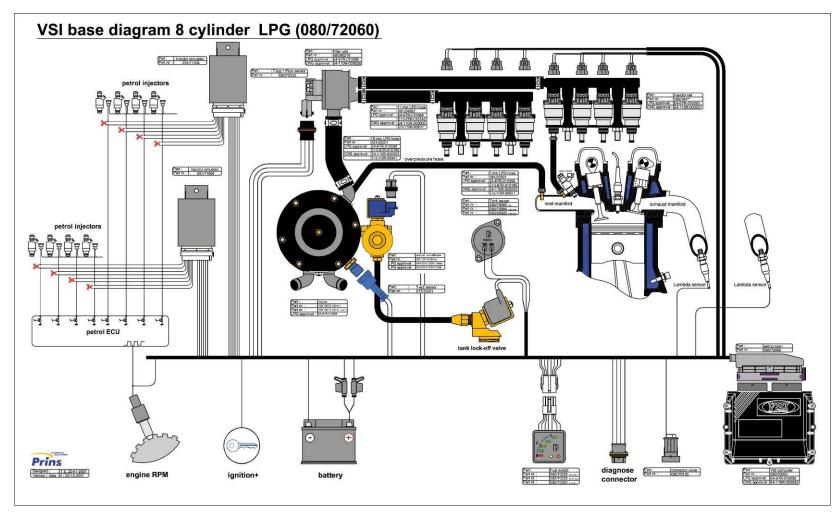


Diagram 11 LPG Base layout VSI 8 cylinder solder

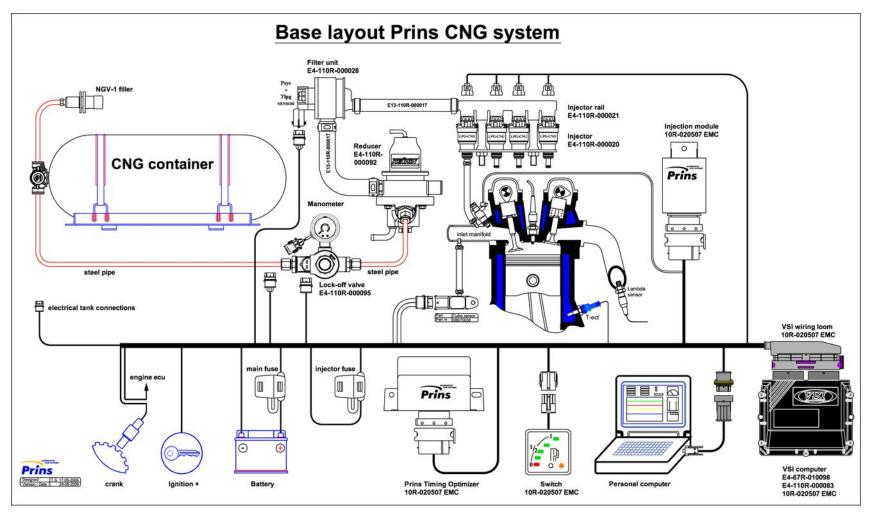


Diagram 12 CNG Base layout

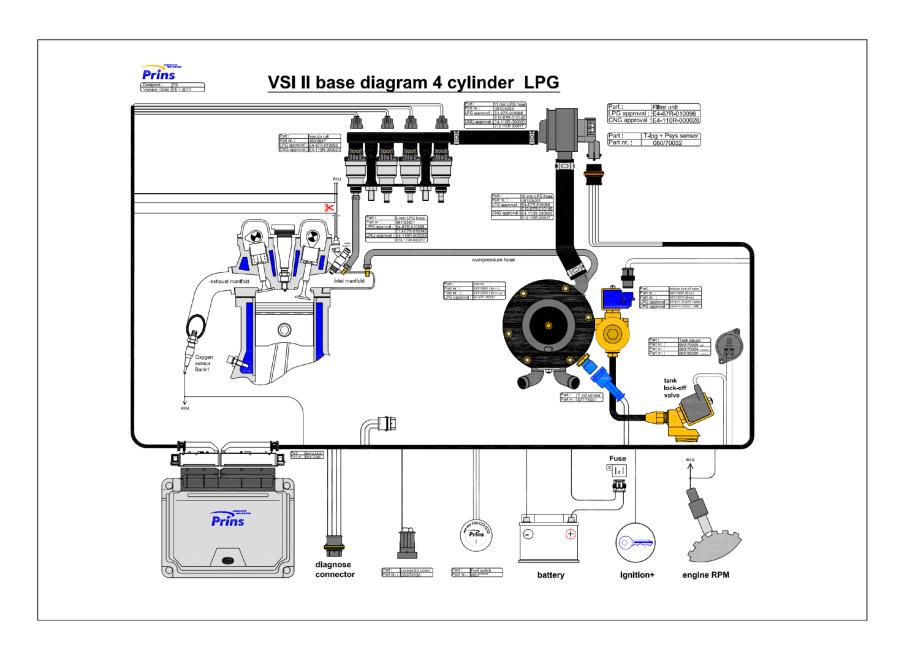


Diagram 13 VSI-2.0 LPG Base layout

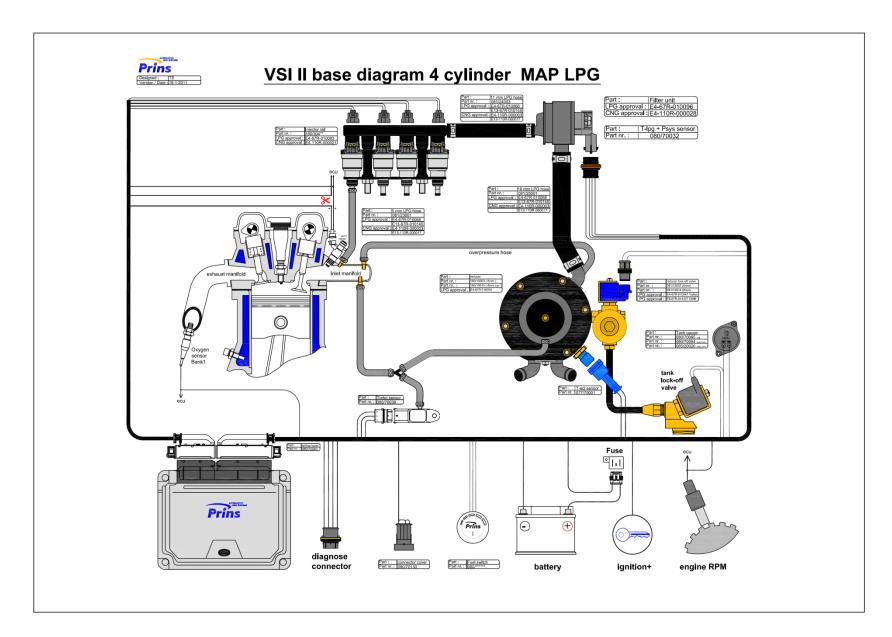


Diagram 14 VSI-2.0 MAP LPG Base layout

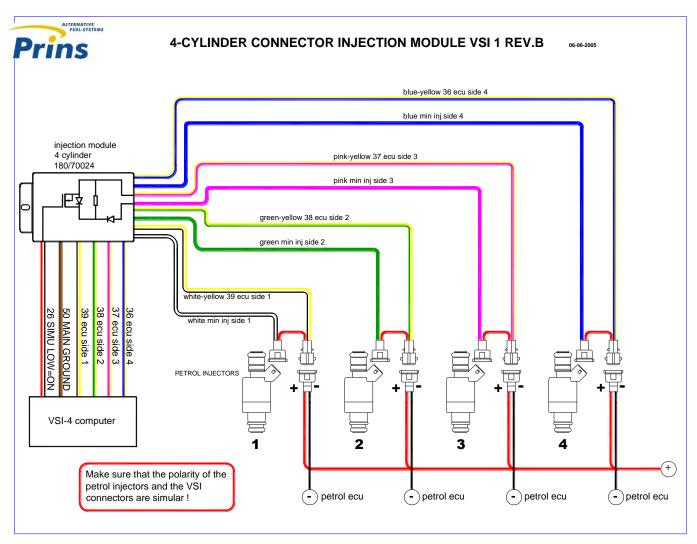


Diagram 13 Injection module 4-cylinder (180/70024 connector)

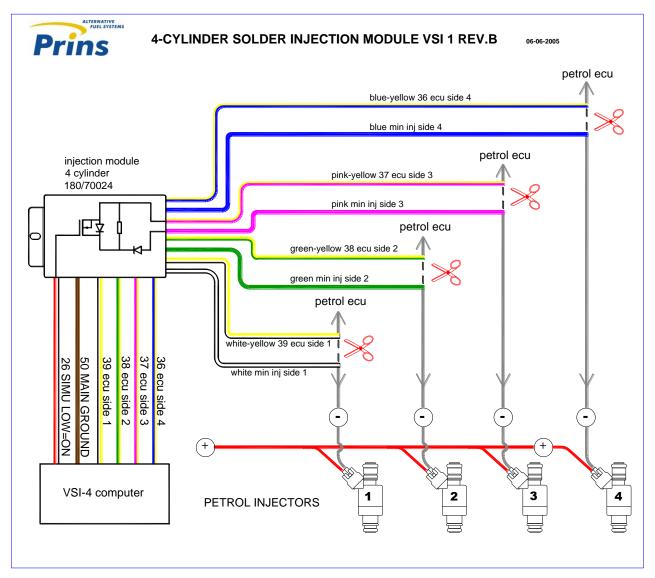


Diagram 14 Injection module 4-cylinder (180/70024 solder)

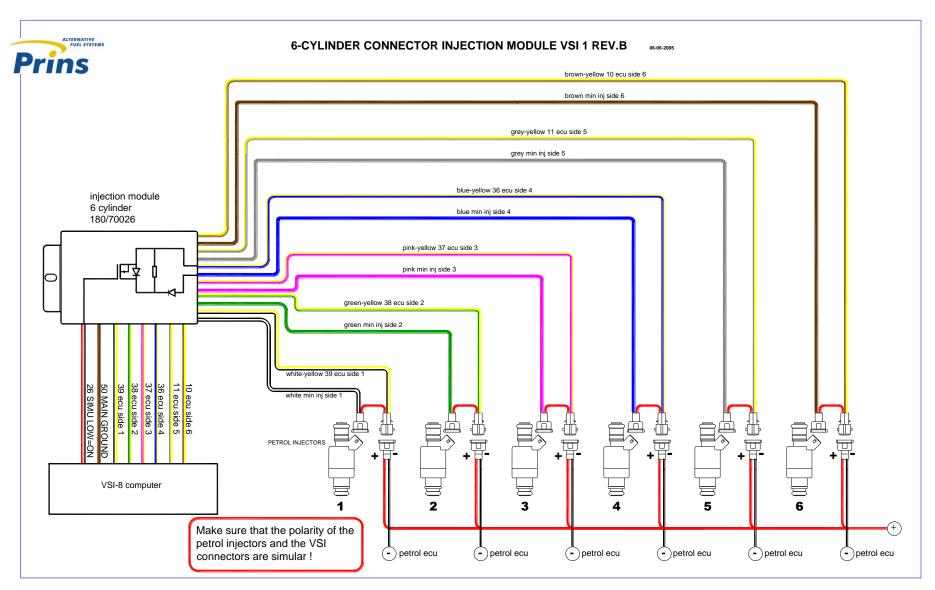


Diagram 15 Injection module 6-cylinder (180/70026 connector)

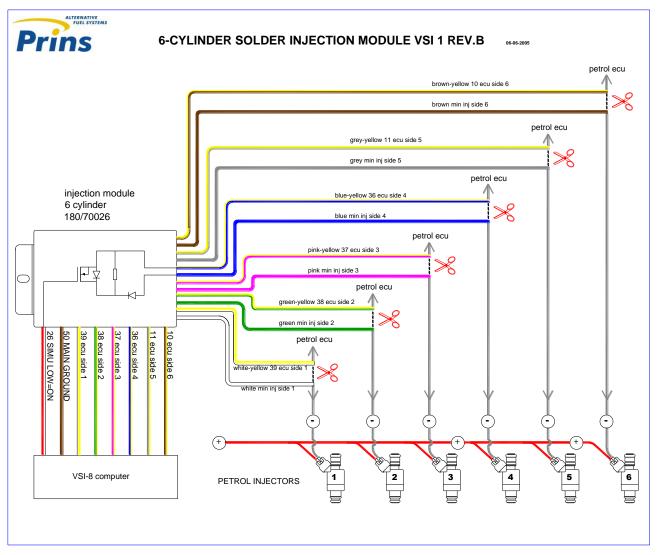


Diagram 16 Injection module 6-cylinder (180/70026 solder)

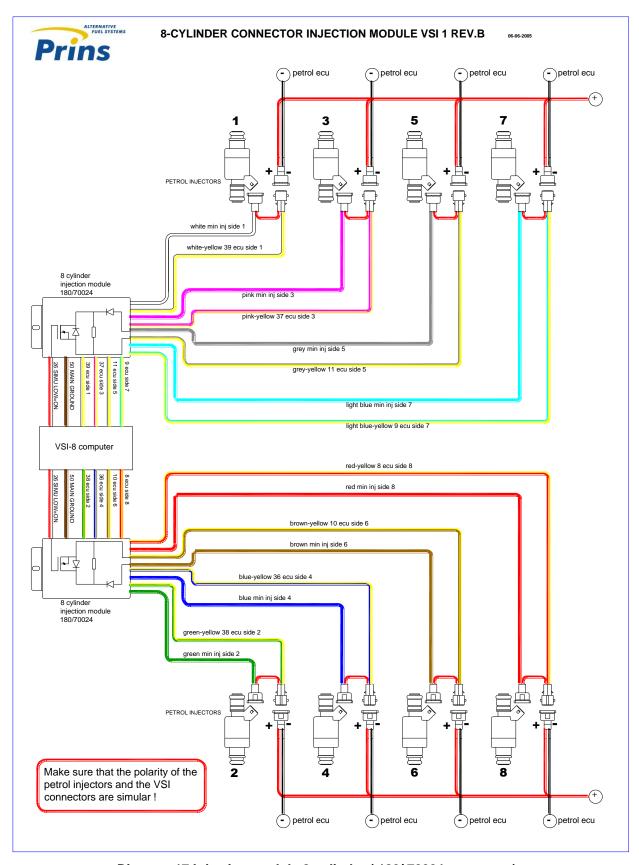


Diagram 17 Injection module 8-cylinder (180/70024 connector)

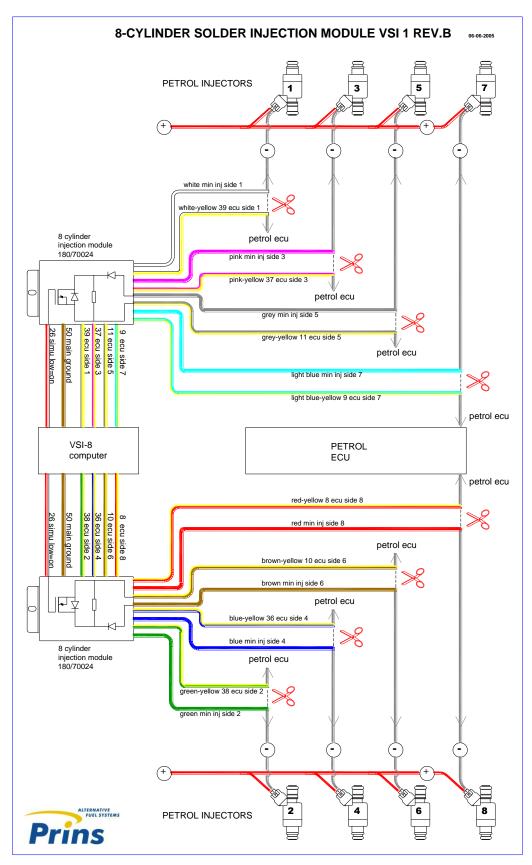


Diagram 18 Injection module 8-cylinder (180/70024 solder)

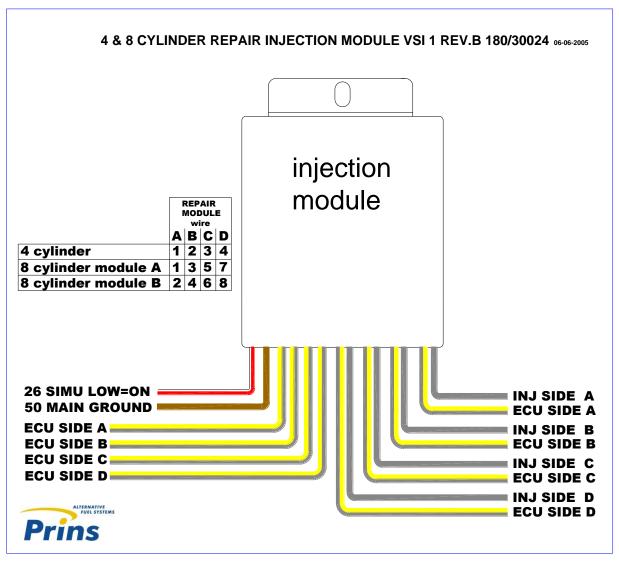


Diagram 19 Repair module 180/30024 (4-8 cylinder)

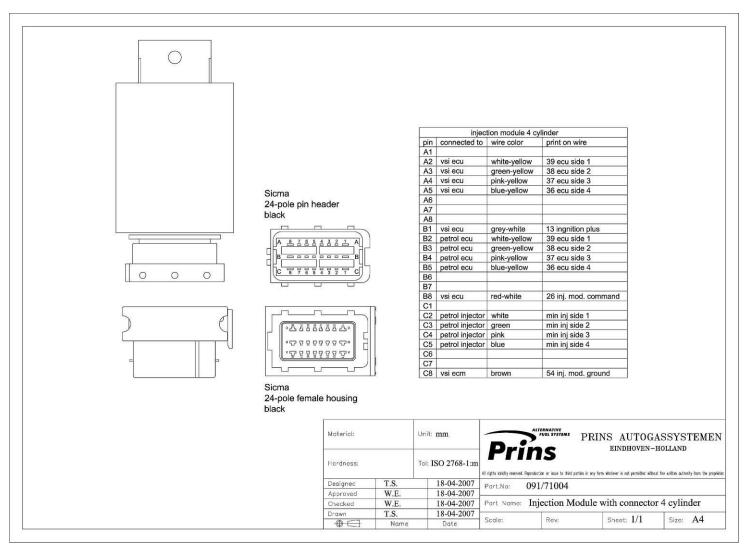


Diagram 20 connector injection module 091/71004

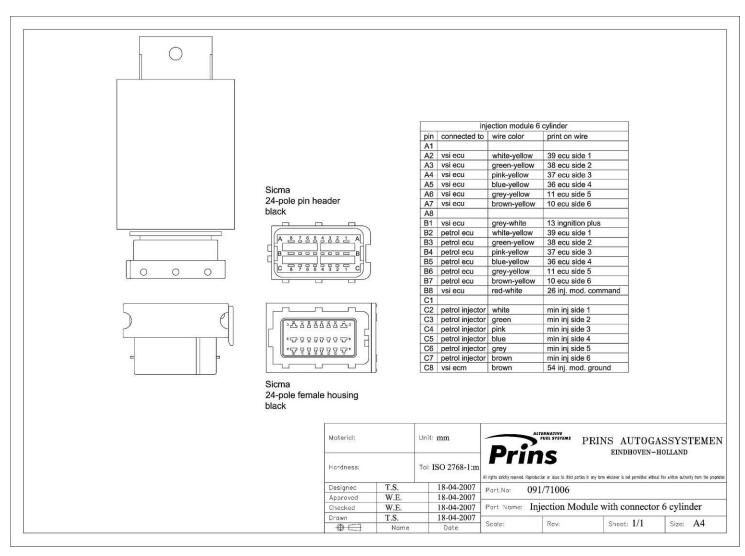


Diagram 21 injection module 091/71006

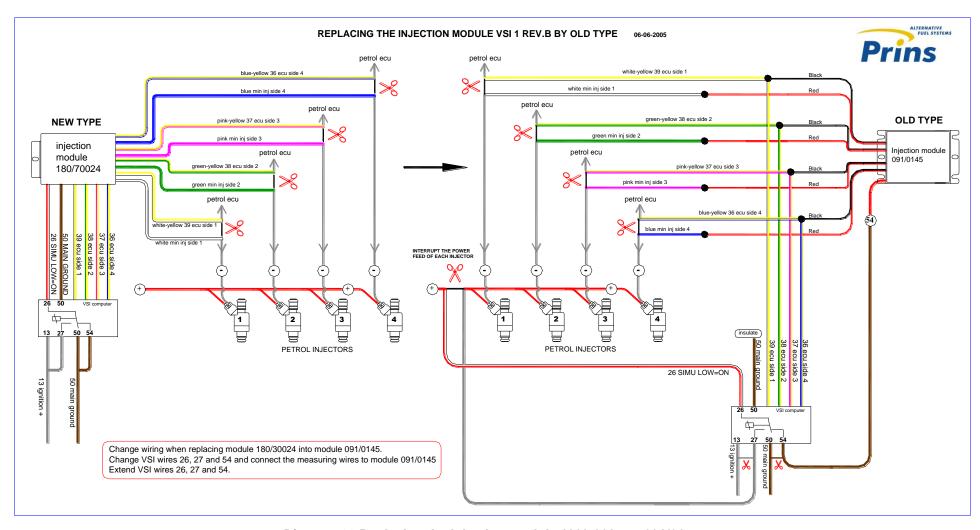


Diagram 22 Replacing the injection module 180/70024 \rightarrow 091/0145

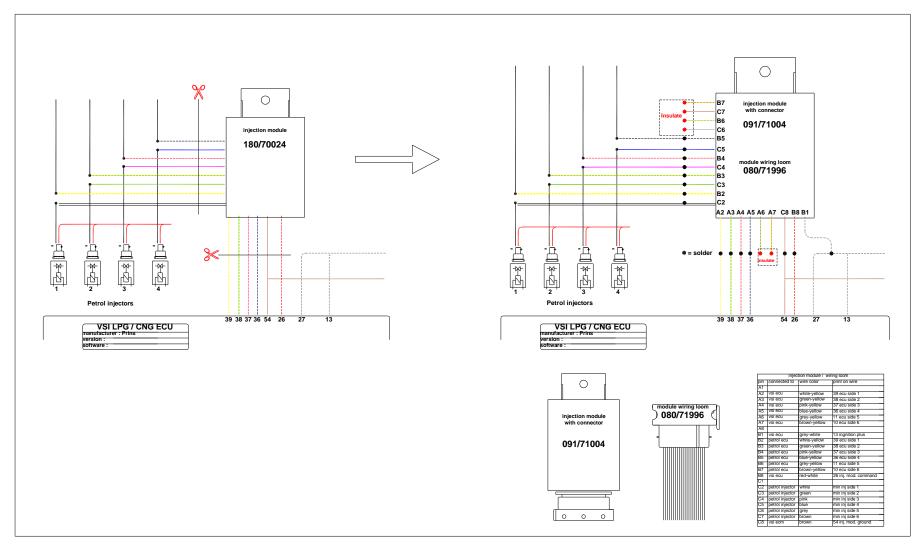


Diagram 23 Replacing the injection module 180/70024 → 091/71004 (4 cylinder)

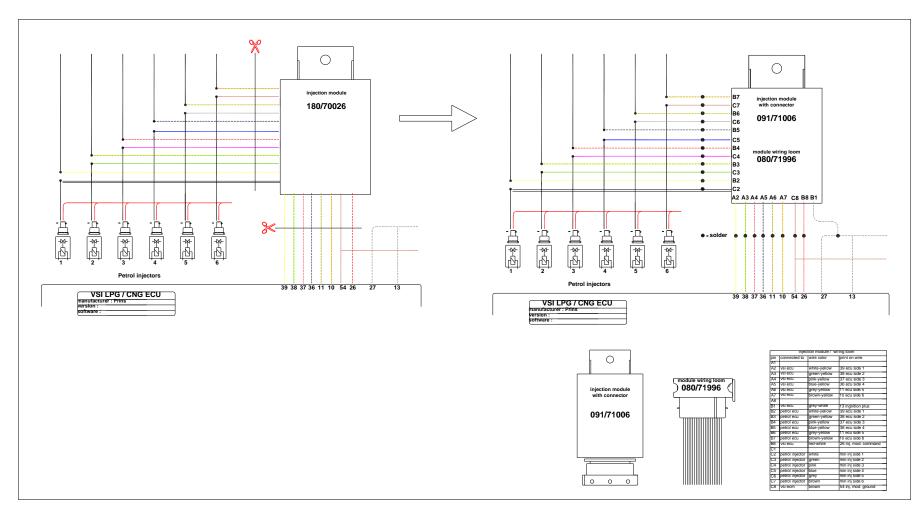


Diagram 24 Replacing the injection module 180/70026 → 091/71006 (6 cylinder)

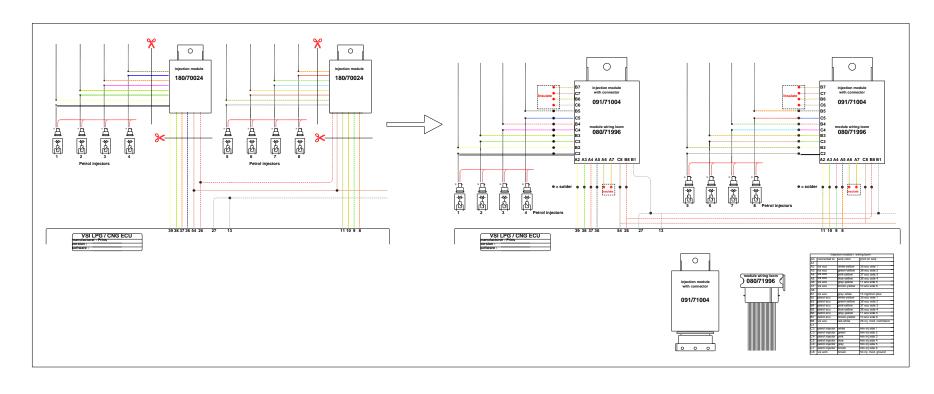


Diagram 25 Replacing the injection module 180/70024 → 091/71004 (8 cylinder)

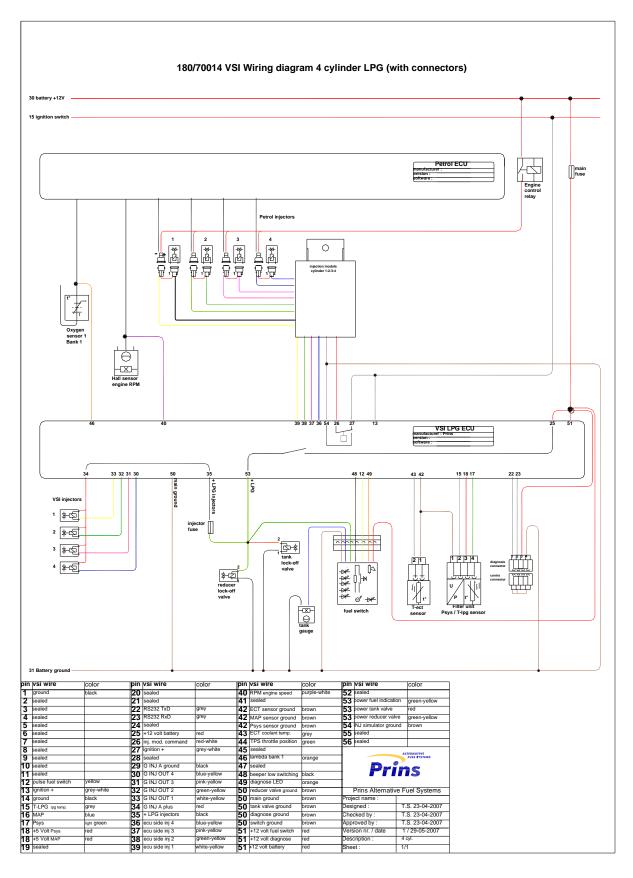


Diagram 26 LPG wiring 180/70014

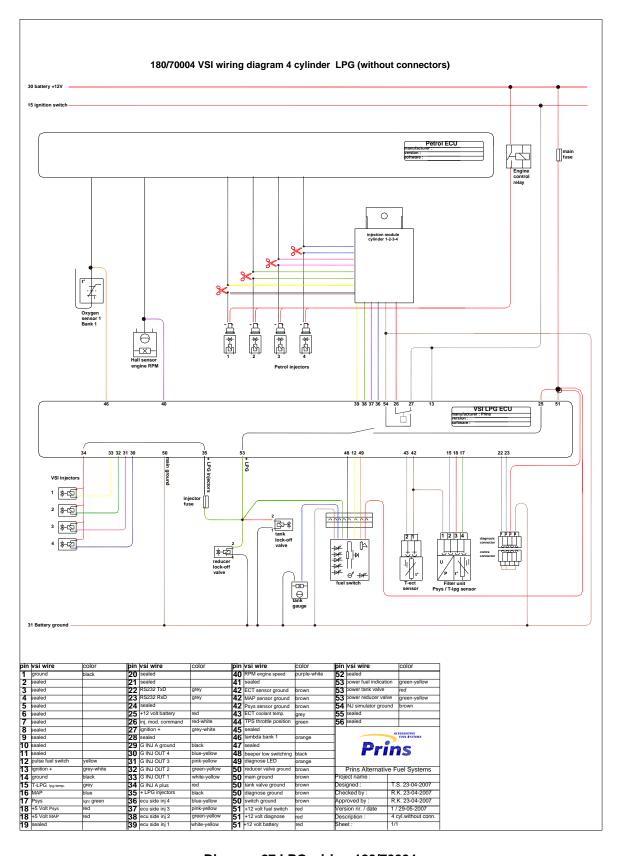


Diagram 27 LPG wiring 180/70004

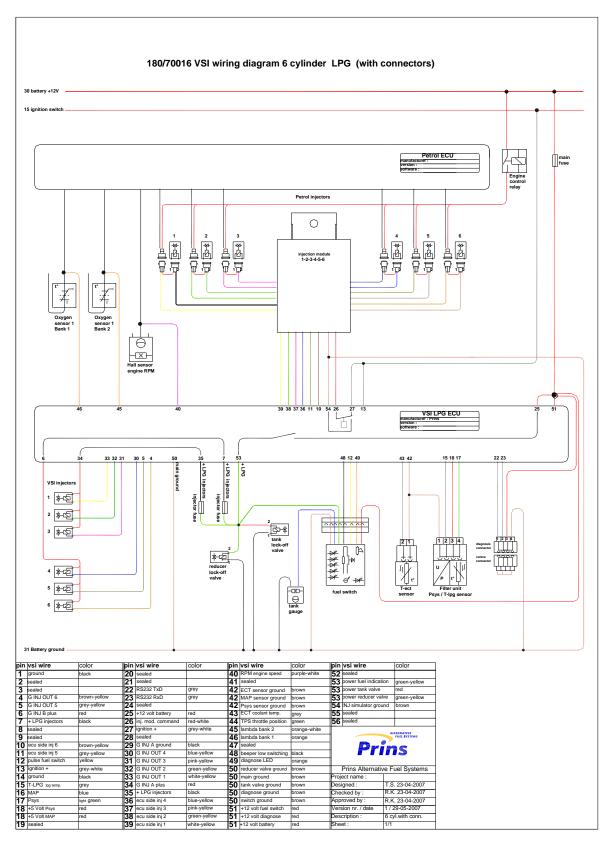


Diagram 28 LPG wiring 180/70016

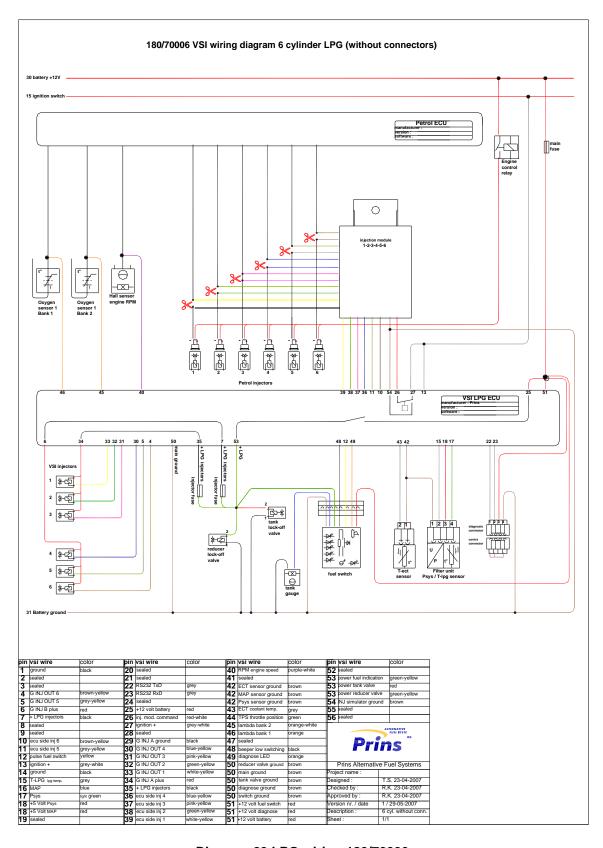


Diagram 29 LPG wiring 180/70006

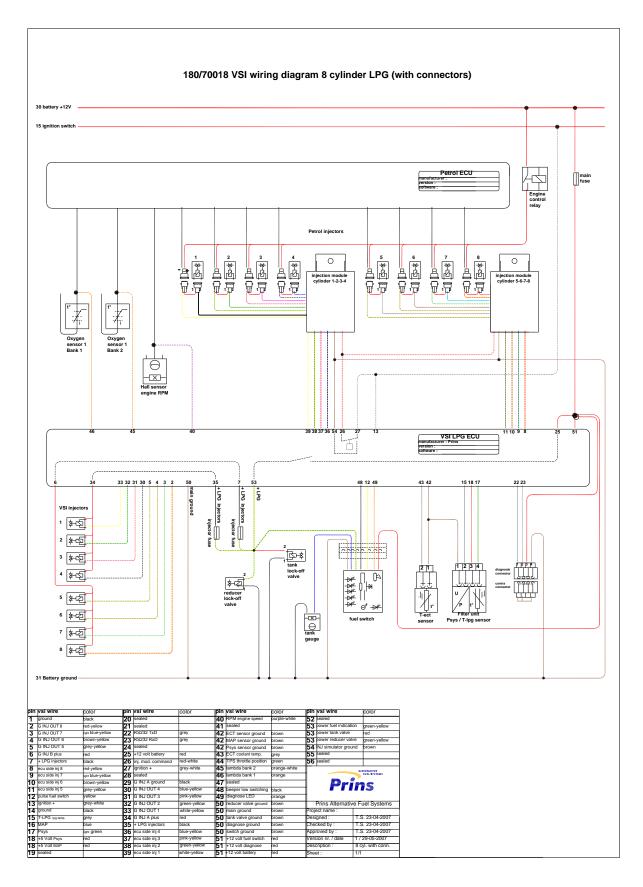


Diagram 30 LPG wiring 180/70018

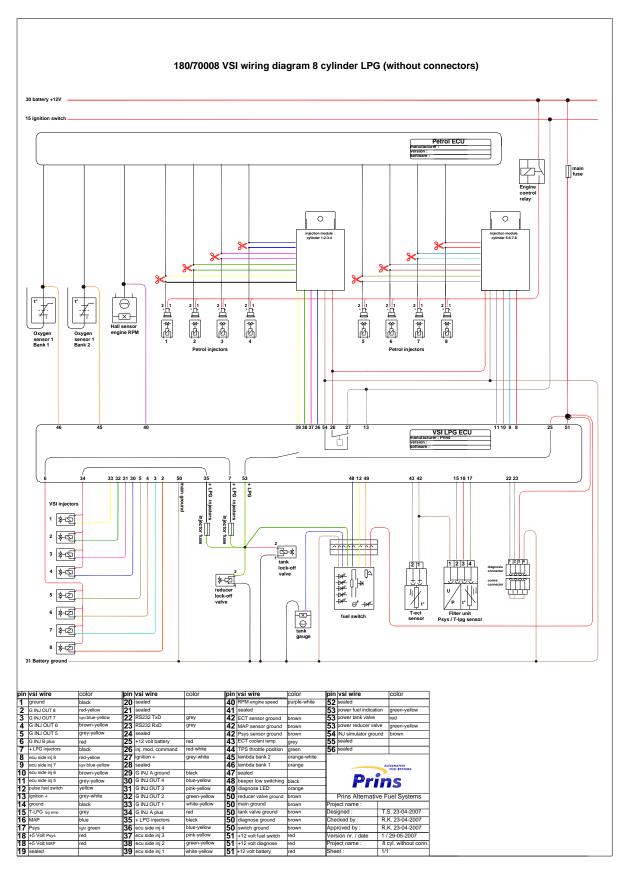


Diagram 31 LPG wiring 180/70008

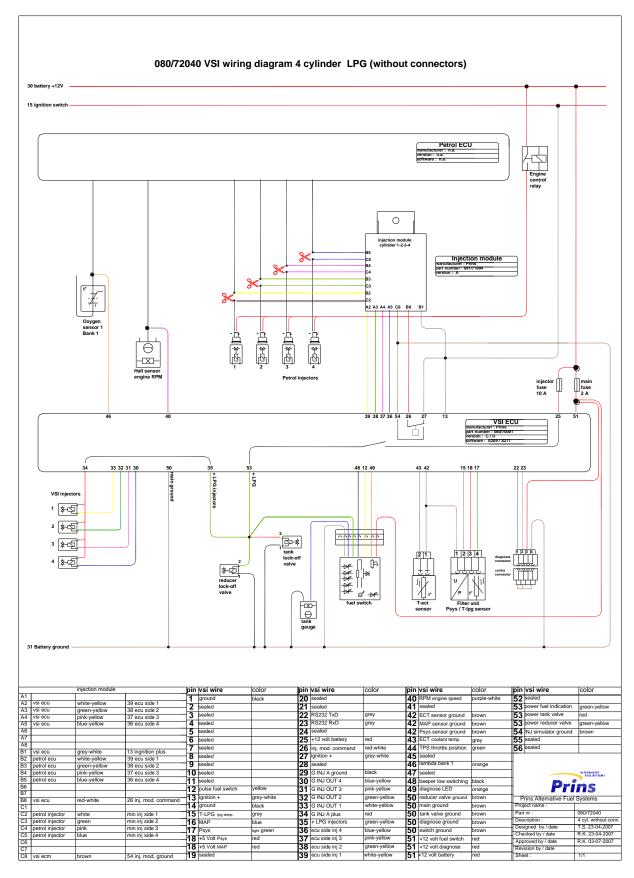


Diagram 32 LPG wiring 080/72040

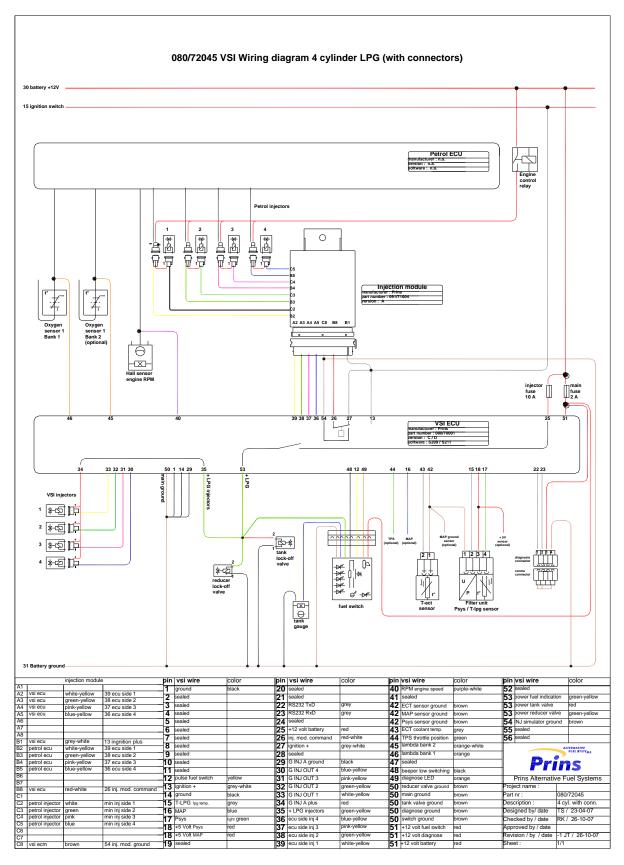


Diagram 33 LPG wiring 080/72045

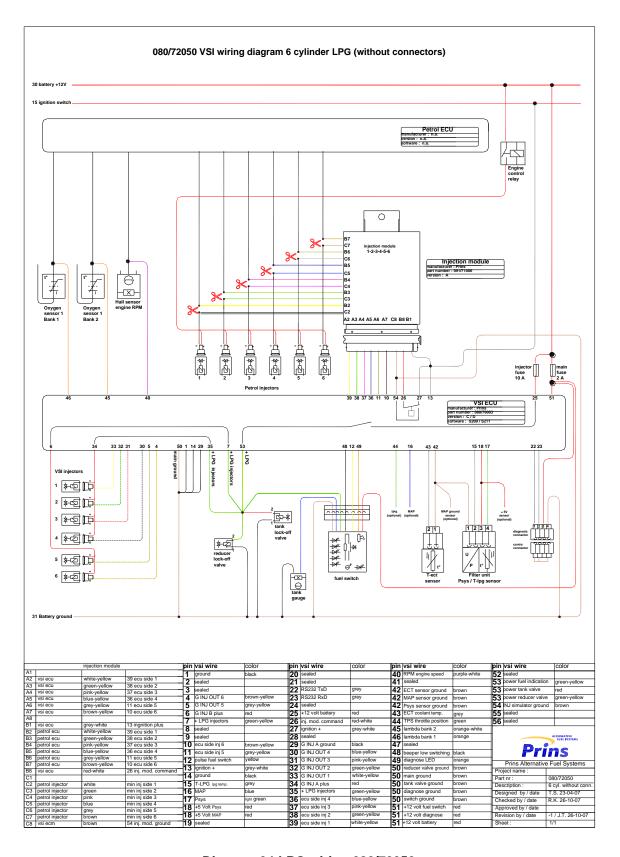


Diagram 34 LPG wiring 080/72050

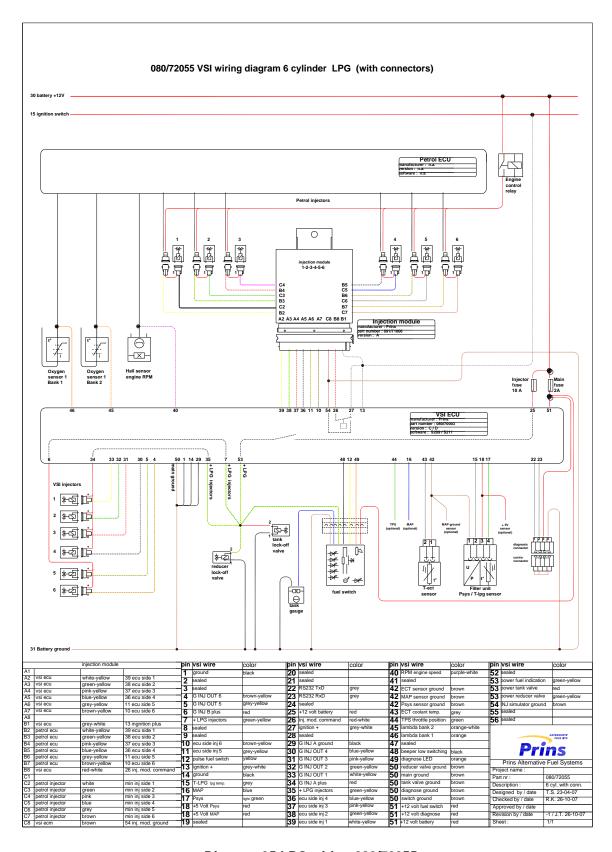


Diagram 35 LPG wiring 080/72055

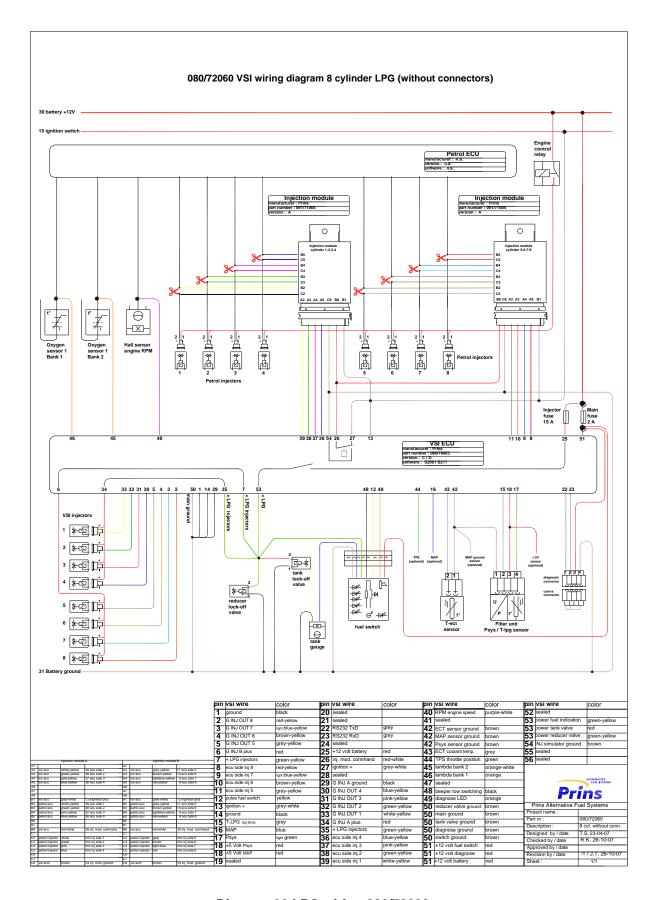


Diagram 36 LPG wiring 080/72060

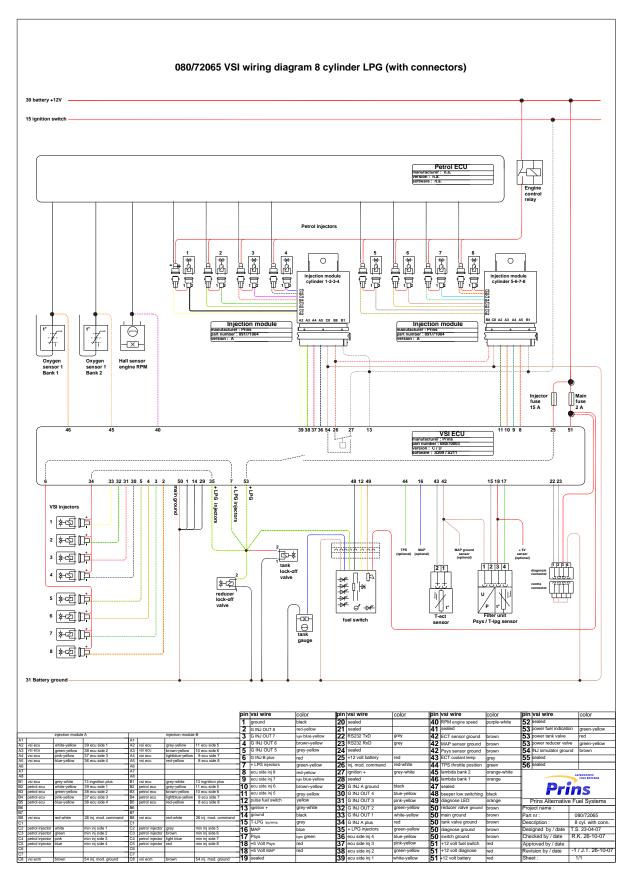


Diagram 37 LPG wiring 080/72065

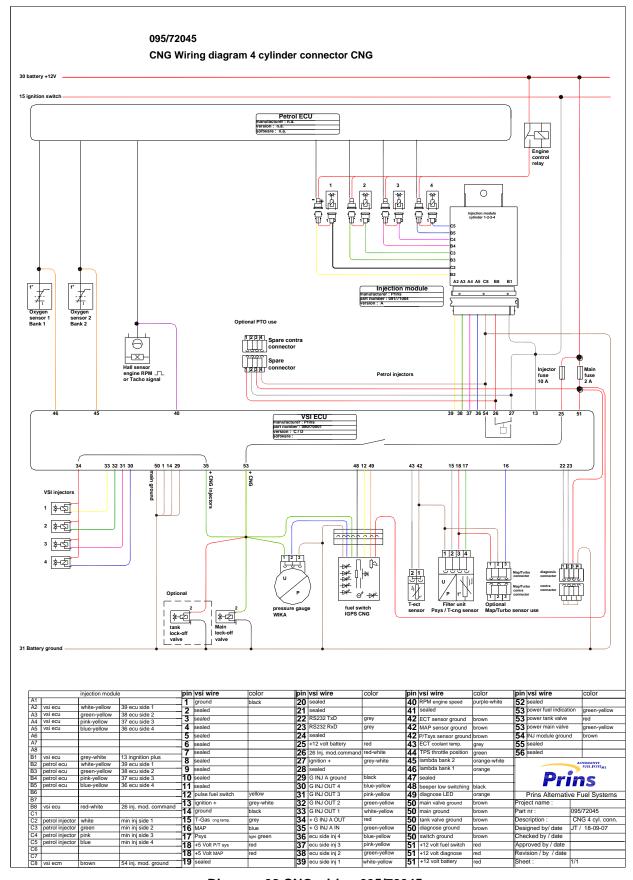


Diagram 38 CNG wiring 095/72045

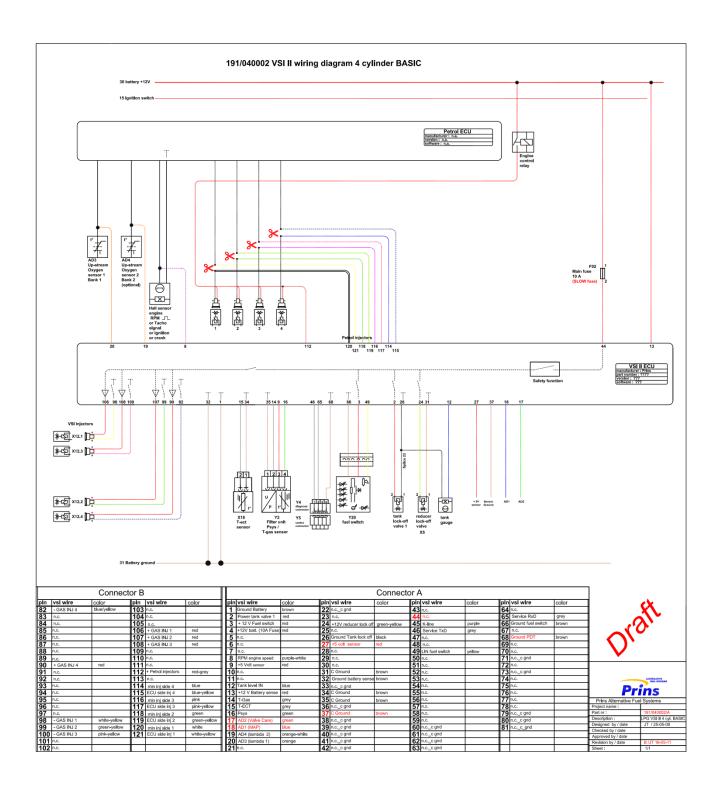


Diagram 39 VSI-2.0 wiring 191/040002

Trouble code chart LPG

Trouble code	Definition		Check / solution				
100	Lambda to long to	rich.	Check when operating on petrol and LPG that there is good lambda signal				
	_		movement.				
101	Lambda to long to l	ean.	Check when operating on petrol and LPG that there is good lambda signal movement.				
102	Lambda to long to l	lean during open	Check when operating on petrol and LPG that there is good lambda signal movement.				
110	T-ECT>= 171°C		Check if the ECT sensor (blue) in the reducer is connector is connected to ground.				
111	T-ECT>= -40°C		Check if the ECT sensor (blue) in the reducer has a power connection.				
120	T-LPG>= 171°C		Check the ground connection of the Pressure/temperature sensor in the filter unit.				
121	T-LPG>= -40°C		Check the power connection of the Pressure/temperature sensor in the filter unit.				
150	Psys<= Low_Level		Based on a pressure drop in the system, this can be caused by an empty LPG tank, incorrect solenoid valve, polluted filter or incorrectly adjusted pressure.				
160	ECM-VSI not activa	ated	Activate the LPG computer with the diagnostic program, using the F11 function key.				
180	T-Board >= 90°C		LPG computer circuit board to hot, replace the VSI computer in a cooler area.				
181	Battery voltage to h	nigh	Check board voltage / alternator output and condition of the battery.				
		VSI injector overload	Injector current to high, check for short circuiting				
211-221-231-24	1-251-261-271-281	VSI injector noload	Injector current to low, check for bad connections.				
310	Adjusted pressure	on idle out of range	Adjust the idle pressure to the value shown by parameter " Idle Level "				
311	Programm error du memory		Check parameter settings, contact Prins Autogassystemen.				
320	Psys voltage to low	1	Check the ground connection of the Pressure/temperature sensor in the filter unit.				
321	Psys voltage to hig	h	Check the power connection of the Pressure/temperature sensor in the filter unit.				
322	Psys > 3,5 Bar		Check the coolant temperature (T-ect) and the evaporator for leakage of the first stage.				
330	unexpected parame	eter change	Contact Prins Autogassystemen.				
340	reducer warms up t		Check the water connections / circuit.				
341	Gas leakage, system pressure is less then 1.25 bar after 4 hours when the engine is not running		Check the system for gas leakage.				
div.	System switches to LPG but engine stalls immediately.		LPG tank empty ? Lock-off valves open ?				
div.	No injection timing	on LPG (0 Msec.)	Check the injection module.				
div.	The LPG system system LPG and I	witches constantly	- Check coolant system for air T-ect sensor in the evaporator malfunction.				
div.	Engine hesitates on high revs, and not running on all cylinders. Engine runs good on idle.						
div.	Switch LED's don't	lit up	Check the main fuse of the VSI system Check ignition+ (VSI wire 13)				
div.	Fault codes when turning the ignition off (key out the ignition)		Caused by different switch off times between ignition+ and injector power. Connect VSI wire 13 to the petrol injector feed instead of ignition+.				
div.	The orange LED on the switch flashes		Activate the LPG computer with the diagnostic program, using the F11 function key.				
div.	The LPG system sy		LPG tank empty?				
div.	Not running on all cylinders on Ipg		Check parameter 10, number of cylinders.				
div.	No injection times on lpg		Check the connections of the injection module.				
div.	Injection time "falls" to 0 mSec on LPG		Check the injection module.				
div.	Check engine while injector circuit malficontrol (limb home)	unction, no lambda	Replace injection module				
div.	Not starting / runnir		Check the connections of the injection module.				

Maintenance instructions

When you drive on LPG/CNG, maintaining your car is even more important than when using petrol. Since the specifications of LPG/CNG differ from those of petrol, minor engine problems which won't disturb the driving comfort while using petrol, may cause major problems while using CNG. Follow the maintenance instructions in order to use LPG/CNG without any problem.

- General maintenance to the car regarding spark plugs, spark plug cables, ignition circuit, valves, etc., has to be carried out according to the instructions of the car manufacturer.
- Proof of maintenance according to the guidelines of the importer is obligatory (completely filled in maintenance booklet).
- Maintenance has to be carried out by a dealer authorised by the importer.
- Adjustments and repairs on your Prins VSI- system should only be carried out by a dealer authorised by Prins Autogassystemen B.V.

MAINTENANCE AND SERVICE

Registration of maintenance and service of the VSI-LPG system.

	25.000 km or after 2 year		100.000 km or after 2 years		175.000 km or after 2 years		250.000 km or after 2 years	
Checklist executed services:								
Lock off valve filter replacement*								
Filter unit filter replacement*								
Hoses + filling hoses checked			Θ		(D)		P	
Fastening of components checked			0		0		0	
Electrical connection + wiring checked	<u> </u>		7		7		7	
Checked for fuel leakage	o St		St		St		JS	
Checked for trouble codes (petrol and LPG) + system pressure	a an		3 3		3		am	
Checked for exhaust emissions	a 5		5		5		P	
Tightening torque of the allen screws of the reducer checked at 8Nm								
	Number of kilomet	tres: Number of kilometres:			Number of kilometres:		Number of kilometres:	
	Date:	Date:			Date:		Date:	

^{*}The service intervals of the filter replacements may be divergent because of the variable LPG quality. Ask your Prins dealer for more information.

Registration of maintenance and service of the VSI-CNG system.

	25.000 km or after 2 years		100.000 km or after 2 years		175.000 km or after 2 years		250.000 km or after 2 years	
Checklist executed services:								
Keihin inlet filter replacement*								
Filter unit filter replacement*								
Hoses + pipes checked		(D)		(D)		(D)		(D)
Fastening of components checked		0		0		0		0
Electrical connection + wiring checked				7				7
Checked for fuel leakage		St		ST.		St		St
Checked for trouble codes (petrol and CNG) + system pressure		3		3		3		am
Checked for exhaust emissions		5		5		5		5
	Number of kilometres:		Number of kilometres:		Number of kilometres:		Number of kilometres:	
	Date:		Date:		Date:		Date:	

^{*}The service intervals of the filter replacements may be divergent because of the variable CNG quality. Ask your Prins dealer for more information.

Checklist after installation

- Connect the serial interface cable and run the VSI diagnosis program.
 Install the VSI main fuse, and program the fuel switch.
 Turn the ignition key in the accessory position.
 When working on the car, beware of moving and rotating parts in the engine compartment.
- 2. When commissioning the LPG/CNG system, you must activate the VSI computer with the diagnosis software. When the VSI-I computer has not been activated, it will keep generating error code 160. To activate the VSI-I computer, select function F11 (activate ECM). After activation erase foultcode 160.
- 3. Check whether the program in the VSI computer matches with the car (dedicated engine set): Refer with F2 to the box number and car description in the diagnosis software and compare these with the set number.
- 4. The system will switch over to LPG/CNG as soon as the temperature of the coolant (T-ect) becomes higher than the parameter T-min set and when the TSO-cold time is expired.
- 5. Check all components and connections for any gas leakage (use a LPG/CNG leak detector device) or foam leak spray. Caution for moving and rotating parts in the engine compartment!
- Let the engine run warm on petrol >80°C.
 Check if the evaporator/coolant water heats up.
 Check the engine signals: petrol injection time, RPM, ECT, lambda

Let the engine run idle on LPG/CNG.

Adjust the LPG evaporator pressure. Refer to the parameter list (or F2 : ID box) for the idle level value set.

Adjust the LPG evaporator pressure in such a way that the pressure measured (P-sys) equals the idle level value.

Turn the socket-head screw at the front of the evaporator to adjust the pressure.

An error code will be generated whenever the pressure variation is to high.

Seal the evaporator with the sticker included in the delivery after having adjusted the pressure.

- 7. Use the diagnosis software to check again all input and output signals.
- Check the system for error codes and solve these, if required.
 Check the petrol MMS for EOBD error codes.
 Place the protection connector on the VSI communication connector.
- 9. Make a test drive and check the driveability on LPG/CNG and petrol.

